

# Urban: Capac OZ URBAN UNIFILL ASCUNS patrat 390x390 PL.300x300 Hext.100 Hin.60 cu inchizator B125 (30413.10-3)

## 30413.10-3

**390 mm**  
HOSSZ / KÜLSŐ ÁTMÉRŐ

**390 mm**  
SZÉLESSÉG / BELSŐ ÁTMÉRŐ



### FELHASZNÁLÁS:

The Galvanized Steel Cover of this class is used to close and protect manholes used in sewer networks located on sidewalks, pedestrian areas and similar areas, parking lots or multi-storey car parks.

### MINŐSÉGI FELTÉTELEK:

- SR EN 124-6
- EU Regulation No. 305/2011

### ELŐNYÖK:

- Durability;
- Aesthetic design;
- Balanced ratio between load class and product weight;
- Warranty (2 years)
- Easy to handle

### TERMÉKGARANCIA:

- 20 years - subject to compliance with assembly, storage and operation instructions.

## SZERELÉS

Installation and commissioning shall only be carried out in areas compliant with the product's load class. Commissioning shall be carried out by specialized personnel.


**!** For efficient installation, we recommend using the Standart Park G12M29-C sealant.

It is used for sealing gutters, pipes and drainage systems;

- Hardening time: 24h/2-3 mm
- Temperature resistance: -40° C to +70° C
- Processing temperature: +5° C to +40° C



- BASE sealing paste (sealant) PP-FB-PB gutters, tube, 310 ml (G12M29-C)

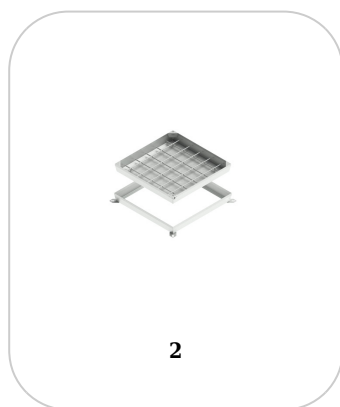

## JELLEMZŐK

<b>Termék neve</b>	Capac OZ URBAN UNIFILL ASCUNS patrat 390x390 PL.300x300 Hext.100 Hin.60 cu inchizator B125 (30413.10-3)
<b>Termékkód</b>	30413.10-3
<b>EAN kód</b>	6427669002161
<b>Termékkategória</b>	Capace ascunse otel zincat (B125)
<b>Brand</b>	Urban
<b>Súly</b>	9.63 kg
<b>Készlet elérhetősége</b>	Egyedi gyártású
<b>Hossz, mm</b>	390
<b>Szélesség, mm</b>	390
<b>Magasság (M), mm</b>	100
<b>Belső átmérő / hézag (mm)</b>	300x300
<b>Terhességi osztály</b>	B125
<b>Termék anyaga</b>	Horganyzott acél
<b>Rögzítőrendszer</b>	konkrét
<b>Garancia, hónap</b>	24
<b>Termelő</b>	VODALAND INDUSTRY LLC