

# Urban: Capac OZ URBAN UNIFILL ASCUNS patrat 390x390 PL.300x300 Hext.100 Hin.60 cu inchizator B125 (30413.10-3)

## 30413.10-3

**390 mm**  
HOSSZ / KÜLSŐ ÁTMÉRŐ

**390 mm**  
SZÉLESSÉG / BELSŐ ÁTMÉRŐ



### FELHASZNÁLÁS:

The Galvanized Steel Cover of this class is used to close and protect manholes used in sewer networks located on sidewalks, pedestrian areas and similar areas, parking lots or multi-storey car parks.

### MINŐSÉGI FELTÉTELEK:

- SR EN 124-6
- EU Regulation No. 305/2011

### ELŐNYÖK:


- Durability;
- Aesthetic design;
- Balanced ratio between load class and product weight;
- Warranty (2 years)
- Easy to handle

### ÉLETTARTAM:

- 20 years - subject to compliance with assembly, storage and operation instructions.

## SZERELÉS


Installation and commissioning shall only be carried out in areas compliant with the product's load class. Commissioning shall be carried out by specialized personnel.

 For efficient installation, we recommend using the Standart Park G12M29-C sealant.

It is used for sealing gutters, pipes and drainage systems;

- Hardening time: 24h/2-3 mm
- Temperature resistance: -40° C to +70° C
- Processing temperature: +5° C to +40° C

- BASE sealing paste (sealant) PP-FB-PB gutters, tube, 310 ml (G12M29-C)

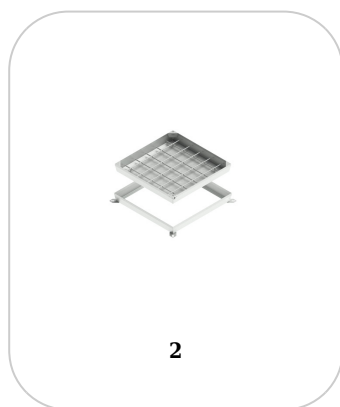

## JELLEMZŐK

<b>Termék neve</b>	Capac OZ URBAN UNIFILL ASCUNS patrat 390x390 PL.300x300 Hext.100 Hin.60 cu inchizator B125 (30413.10-3)
<b>Termékkód</b>	30413.10-3
<b>EAN kód</b>	6427669002161
<b>Termékkategória</b>	Capace ascunse otel zincat (B125)
<b>Brand</b>	Urban
<b>Súly</b>	9.63 kg
<b>Készlet elérhetősége</b>	Egyedi gyártású
<b>Hossz, mm</b>	390
<b>Szélesség, mm</b>	390
<b>Magasság (M), mm</b>	100
<b>Belső átmérő / hézag (mm)</b>	300x300
<b>Terhességi osztály</b>	B125
<b>Termék anyaga</b>	Horganyzott acél
<b>Rögzítőrendszer</b>	konkrét
<b>Garancia, hónap</b>	24
<b>Élettartam, évek</b>	20
<b>Termelő</b>	VODALAND INDUSTRY LLC