

Urban: Capac OZ URBAN UNIFILL ASCUNS patrat 390x390 PL.300x300 Hext.100 Hin.60 cu inchizator B125 (30413.10-3)

30413.10-3

390 mm

LENGTH / EXTERIOR DIAMETER

390 mm

WIDTH / INTERIOR DIAMETER



USAGE:

The Galvanized Steel Cover of this class is used to close and protect manholes used in sewer networks located on sidewalks, pedestrian areas and similar areas, parking lots or multi-storey car parks.

QUALITY CONDITIONS:

- SR EN 124-6
- EU Regulation No. 305/2011

ADVANTAGES:


- Durability;
- Aesthetic design;
- Balanced ratio between load class and product weight;
- Warranty (2 years)
- Easy to handle

LIFESPAN:

- 20 years - subject to compliance with assembly, storage and operation instructions.

INSTALLATION


Installation and commissioning shall only be carried out in areas compliant with the product's load class. Commissioning shall be carried out by specialized personnel.

 For efficient installation, we recommend using the Standart Park G12M29-C sealant.

It is used for sealing gutters, pipes and drainage systems;

- Hardening time: 24h/2-3 mm
- Temperature resistance: -40° C to +70° C
- Processing temperature: +5° C to +40° C

- BASE sealing paste (sealant) PP-FB-PB gutters, tube, 310 ml (G12M29-C)

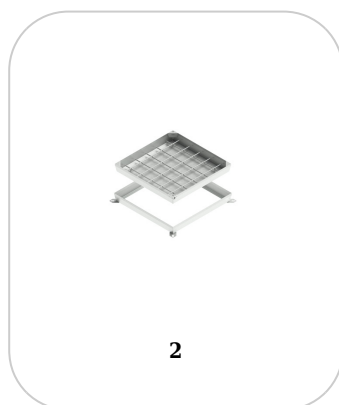

CHARACTERISTICS

Product name	
Product code	30413.10-3
EAN code	6427669002161
Product category	Capace ascunse otel zincat (B125)
Brand	Urban
Weight	9.63 kg
Stock availability	On order
Length, mm	390
Width, mm	390
Height (H), mm	100
Interior diameter / Clear opening (mm)	300x300
Load class	B125
Product Material	Galvanized Steel
Fastening System	beton
Warranty, months	24
Lifespan, years	20
Producer	VODALAND INDUSTRY LLC