


# Clean: Separator hidrocarburi GRP OilBase OB1-25(125)LS D2000 H2515 TN2500 Ø400 (SHOB1-25/125LS)

## SHOB1-25/125LS

**2000 mm**  
ÁTMÉRŐ

**2515 mm**  
MAGASSÁG/HOSSZ

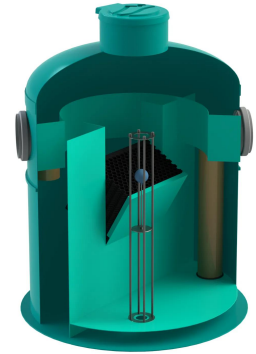

### FELHASZNÁLÁS:

Dimensional range: Hydrocarbon separators made of glass fiber reinforced polyester with nominal flow rates from 1 l/s to 50l/s with by-pass. Light liquid separators protect the groundwater from hydrocarbons generated by car traffic. Applications: Underground and above-ground parking lots, gas stations, logistics parks.

### MINŐSÉGI FELTÉTELEK:

- SR EN 858
- Declaration of conformity

### ELŐNYÖK:

- high temperature resistance (up to 80°C)
- improves the separation effect
- increases coagulation efficiency
- resistant to mechanical damage
- resistant to chemical influences and ultraviolet rays
- easy to clean

### ÉLETTARTAM:





The manufacturer offers a warranty during the operation of CLEAN installations, provided that the user complies with the operating, transportation and storage conditions established in the Technical Book of the products.

- Warranty during the operation period - 2 years from the date of delivery of the equipment
- The estimated life span is 50 years from the date of commissioning





## SZERELÉS

The assembly and commissioning of the CLEAN range products is carried out according to the instructions provided upon delivery of the products, which are present in the Technical Book of the product. All optional accessories of the product will be sealed with mastic.

- !** For efficient installation, we recommend using G12M29-C sealant. It is used for sealing gutters, pipes and drainage systems.
- Curing time: 24h/2-3 mm
  - Operating temperature: -10° C to +40° C
  - Storage conditions: Store in a ventilated area, at low temperatures.
- BASE sealant, construction products, 310 ml tube (G12M29-C).

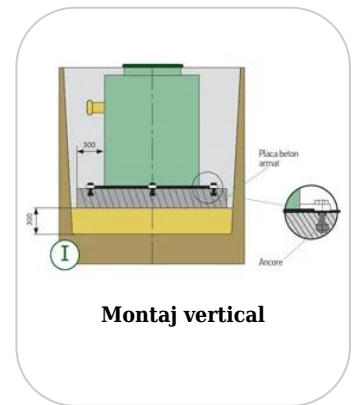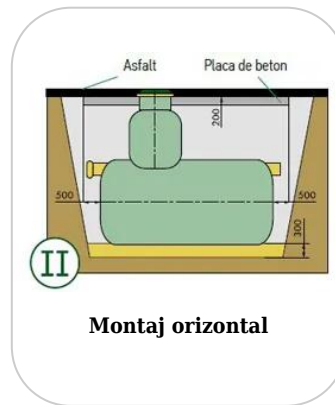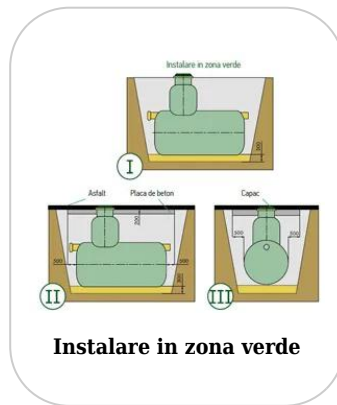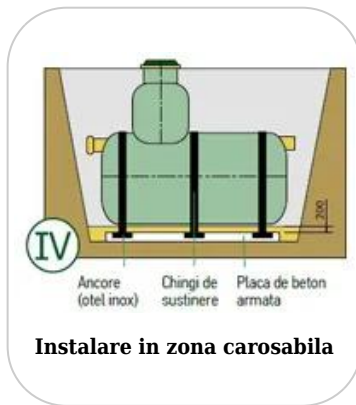

## Tartozékok SHOB1-25/125LS

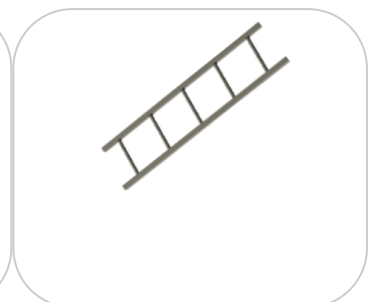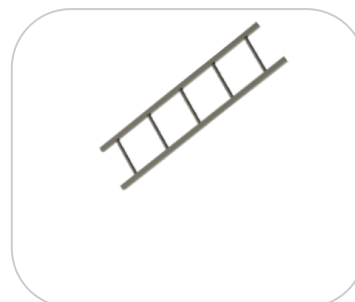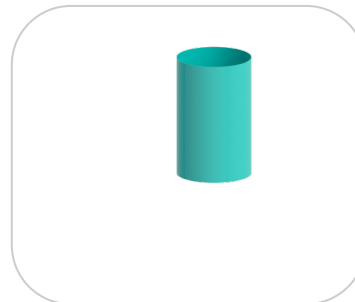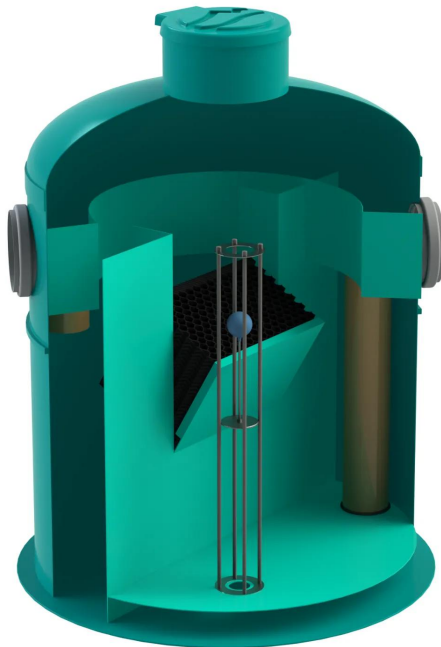

SHOB1-3/15LS	GRP hydrocarbon separator OilBase OB1-3(15)LS D1200 H1515TN300 Ø201
SHOB1-6/30LS	GRP OilBase hydrocarbon separator OB1-6(30)LS D1400 H1865 TN600 Ø250
SHOB1-8/40LS	GRP OilBase OB1-8(40)LS hydrocarbon separator D1600 H1915 TN800 Ø315
SHOB1-10/50LS	GRP hydrocarbon separator OilBase OB1-10(50)LS D1600 H2115 TN1000 Ø315
SHOB1-15/75LS	GRP OilBase OB1-15(75)LS hydrocarbon separator D1800 H2115 TN1500 Ø315
SHOB1-20/100LS	GRP OilBase hydrocarbon separator OB1-20(100)LS D1800 H2515 TN2000 Ø315
SHOB1-25/125LS	GRP OilBase hydrocarbon separator OB1-25(125)LS D2000 H2515 TN2500 Ø400
SHOB1-30/150LS	GRP OilBase hydrocarbon separator OB1-30(150)LS D2000 H2915 TN3000 Ø400
SHOB1-35/175LS	GRP OilBase hydrocarbon separator OB1-35(175)LS D2400 H2570 TN3500 Ø400
SHOB1-40/200LS	GRP OilBase hydrocarbon separator OB1-40(200)LS D2400 H2770 TN4000 Ø400
SHOB1-45/225LS	GRP OilBase hydrocarbon separator OB1-45(225)LS D2400 H2970 TN4500 Ø400
SHOB1-50/250LS	GRP hydrocarbon separator OilBase OB1-50(250)LS D2400 H2970 TN4500 Ø400

## JELLEMZŐK

<b>Termék neve</b>	Separator hidrocarburi GRP OilBase OB1-25(125)LS D2000 H2515 TN2500 Ø400 (SHOB1-25/125LS)
<b>Termékkód</b>	SHOB1-25/125LS
<b>EAN kód</b>	6427669027720
<b>Termékkategória</b>	Separatoare Hidrocarburi OilBase cu by-pass
<b>Brand</b>	Clean
<b>Súly</b>	433.00 kg
<b>Készlet elérhetősége</b>	Egyedi gyártású
<b>Magasság (M), mm</b>	2515
<b>Ereszcsonna-csatlakozás (LN)</b>	2000
<b>Bemeneti csatlakozó átmérője (DNin) mm</b>	400
<b>Kimeneti csatlakozó átmérője (DNout) mm</b>	400
<b>Termék anyaga</b>	Üvegszállal erősített poliészter (PAFS/GRP)
<b>Hasznos térfogat (Vu, liter)</b>	4712
<b>Szénhidrogén térfogat (Vh, liter)</b>	1250
<b>Iszapfogó, (liter)</b>	2500
<b>Szabad lépés</b>	600
<b>Koaleszcens szűrő</b>	Igen
<b>Garancia, hónap</b>	24
<b>Élettartam, évek</b>	50
<b>Termelő</b>	FIBERICA