


# Clean: Separator hidrocarburi GRP OilBase OB1-25LS D2000 H2515 TN2500 Ø250 (SHOB1-25LS)

## SHOB1-25LS

**2000 mm**  
ÁTMÉRŐ

**2515 mm**  
MAGASSÁG/HOSSZ



### FELHASZNÁLÁS:

Dimensional range: Hydrocarbon separators made of glass fiber reinforced polyester with nominal flow rates from 1 l/s to 50l/s without bypass. Light liquid separators protect the groundwater from hydrocarbons generated by car traffic. Applications: Underground and above-ground parking lots, gas stations, logistics parks.

### MINŐSÉGI FELTÉTELEK:

- SR EN 858
- Declaration of conformity

### ELŐNYÖK:

- high temperature resistance (up to 80°C)
- improves the separation effect
- increases coagulation efficiency
- resistant to mechanical damage
- resistant to chemical influences and ultraviolet rays
- easy to clean

### ÉLETTARTAM:





The manufacturer offers a warranty during the operation of CLEAN installations, provided that the user complies with the operating, transportation and storage conditions established in the Technical Book of the products.

- Warranty during the operation period - 2 years from the date of delivery of the equipment
- The estimated life span is 50 years from the date of commissioning





## SZERELÉS

The assembly and commissioning of the CLEAN range products is carried out according to the instructions provided upon delivery of the products, which are present in the Technical Book of the product. All optional accessories of the product will be sealed with mastic.

- !** For efficient installation, we recommend using G12M29C sealant. It is used for sealing gutters, pipes and drainage systems.
- Curing time: 24h/2-3 mm
  - Operating temperature: -10° C to +40° C
  - Storage conditions: Store in a ventilated area, at low temperatures.
- BASE sealant, construction products, 310 ml tube (G12M29-C).

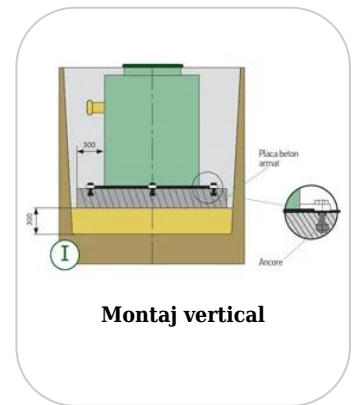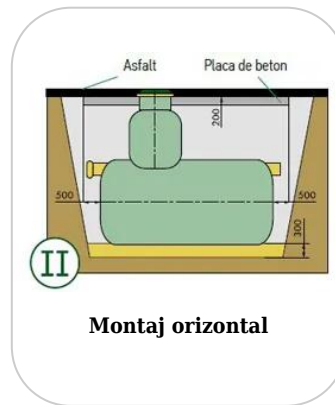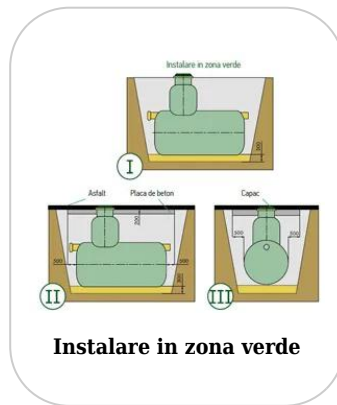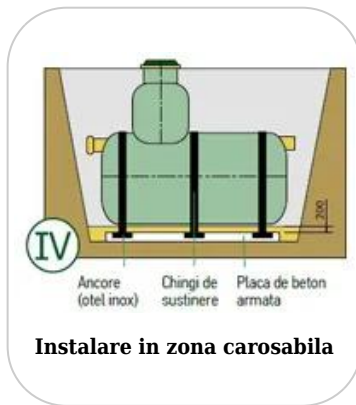

## Tartozékok SHOB1-25LS

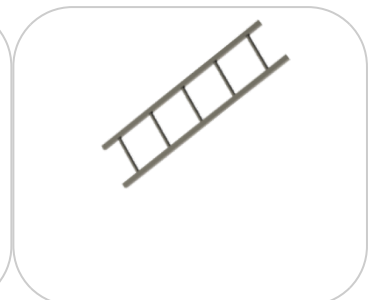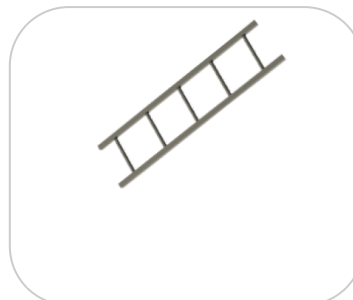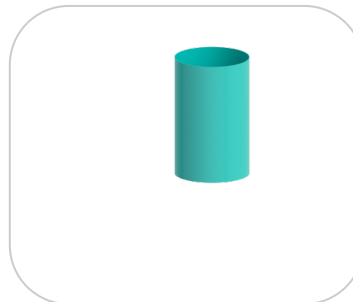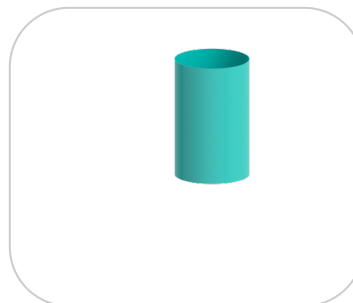

|            |  |
|------------|--|
| SHOB1-1LS  | GRP OilBase OB1-1LS hydrocarbon separator D800 H1300 TN100 Ø110    |
| SHOB1-2LS  | GRP OilBase OB1-2LS hydrocarbon separator D1000 H1465 TN200 Ø110   |
| SHOB1-3LS  | GRP OilBase OB1-3LS hydrocarbon separator D1200 H1515TN300 Ø110    |
| SHOB1-6LS  | GRP OilBase OB1-6LS hydrocarbon separator D1400 H1865 TN600 Ø160   |
| SHOB1-8LS  | GRP OilBase OB1-8LS hydrocarbon separator D1600 H1915 TN800 Ø160   |
| SHOB1-10LS | GRP OilBase OB1-10LS hydrocarbon separator D1600 H2115 TN1000 Ø160 |
| SHOB1-15LS | GRP OilBase OB1-15LS hydrocarbon separator D1800 H2115 TN1500 Ø200 |
| SHOB1-20LS | GRP OilBase OB1-20LS hydrocarbon separator D1800 H2515 TN2000 Ø250 |
| SHOB1-25LS | GRP OilBase OB1-25LS hydrocarbon separator D2000 H2515 TN2500 Ø250 |
| SHOB1-30LS | GRP OilBase OB1-30LS hydrocarbon separator D2000 H2915 TN3000 Ø250 |
| SHOB1-35LS | GRP OilBase OB1-35LS hydrocarbon separator D2400 H2570 TN3500 Ø315 |
| SHOB1-40LS | GRP OilBase OB1-40LS hydrocarbon separator D2400 H2770 TN4000 Ø315 |
| SHOB1-45LS | GRP OilBase OB1-45LS hydrocarbon separator D2400 H2970 TN4500 Ø315 |
| SHOB1-50LS | GRP OilBase OB1-50LS hydrocarbon separator D2400 H3370 TN4500 Ø315 |

## JELLEMZŐK

|  |  |
|--|--|
| <b>Termék neve</b>                             | Separator hidrocarburi GRP OilBase OB1-25LS D2000 H2515 TN2500 Ø250 (SHOB1-25LS) |
| <b>Termékkód</b>                               | SHOB1-25LS   |
| <b>EAN kód</b>                                 | 6427669029427  |
| <b>Termékkategória</b>                         | Separatoare Hidrocarburi OilBase fara by-pass                                    |
| <b>Brand</b>                                   | Clean  |
| <b>Súly</b>                                    | 433.00 kg  |
| <b>Készlet elérhetősége</b>                    | Egyedi gyártású  |
| <b>Hossz, mm</b>                               | 2515   |
| <b>Magasság (M), mm</b>                        | 2515   |
| <b>Ereszcsatorna-csatlakozás (LN)</b>          | 2000   |
| <b>Bemeneti csatlakozó átmérője (DNin) mm</b>  | 250  |
| <b>Kimeneti csatlakozó átmérője (DNout) mm</b> | 250  |
| <b>Elosztó</b>                                 | VODALAND BALKAN SRL  |
| <b>Termék anyaga</b>                           | Üvegszállal erősített poliészter (PAFS/GRP)                                      |
| <b>Hasznos térfogat (Vu, liter)</b>            | 4712.4   |
| <b>Szénhidrogén térfogat (Vh, liter)</b>       | 1250   |
| <b>Izsfogó, (liter)</b>                        | 2500   |
| <b>Szabad lépés</b>                            | 600  |
| <b>Koaleszcens szűrő</b>                       | Igen   |
| <b>Garancia, hónap</b>                         | 24   |
| <b>Élettartam, évek</b>                        | 50   |
| <b>Termelő</b>                                 | FIBERICA   |