

# Urban: Capac FONTA URBAN patrat cu rama 690x690 Hext.75 PL.590x590 D400 (DC70-2)


## DC70-2

**690 mm**

LENGTH / EXTERIOR DIAMETER

**590 mm**

WIDTH / INTERIOR DIAMETER



### USAGE:

Cast Iron Covers in this class are used to close and protect manholes used in sewer networks located on sidewalks, pedestrian areas and similar areas, parking lots or multi-storey car parks.

### QUALITY CONDITIONS:

- SR EN 124-6
- EU Regulation No. 305/2011

### ADVANTAGES:

- Durability;
- Aesthetic design;
- Balanced ratio between load class and product weight;
- Easy to handle

### LIFESPAN:

- 20 years - subject to compliance with assembly, storage and operation instructions.

## INSTALLATION

Installation and commissioning shall only be carried out in areas compliant with the product's load class. Commissioning shall be carried out by specialized personnel.



**!** For efficient installation, we recommend using G12M29-C sealant.

It is used for sealing gutters, pipes and drainage systems;

- Curing time: 24h/2-3 mm
- Temperature resistance: -40° C to +70° C
- Processing temperature: +5° C to +40° C



- BASE sealing paste (sealant) PP-FB-PB gutters, tube, 310 ml (G12M29-C)

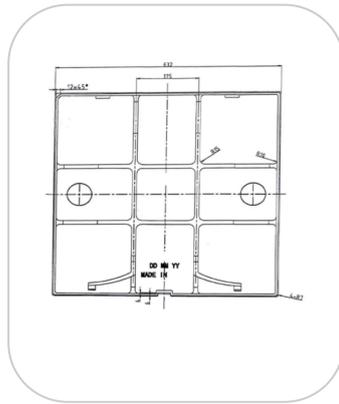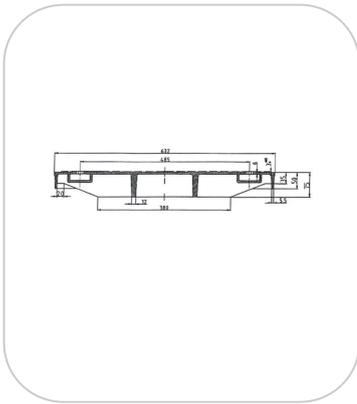

## CHARACTERISTICS

<b>Product name</b>	Capac FONTA URBAN patrat cu rama 690x690 Hext.75 PL.590x590 D400 (DC70-2)
<b>Product code</b>	DC70-2
<b>EAN code</b>	6427669003502
<b>Product category</b>	Capace fonta (B125 - F900)
<b>Brand</b>	Urban
<b>Weight</b>	0.00 kg
<b>Stock availability</b>	Stockable
<b>Length, mm</b>	690
<b>Width, mm</b>	690
<b>Height (H), mm</b>	75
<b>Interior diameter / Clear opening (mm)</b>	590
<b>Exterior diameter (mm)</b>	-
<b>Load class</b>	D400
<b>Distributor</b>	VODALAND BALKAN SRL
<b>Product Material</b>	Cast Iron
<b>Fastening System</b>	Şurub, Balama
<b>Colour</b>	Black
<b>Forma</b>	Patrat
<b>Warranty, months</b>	24
<b>Lifespan, years</b>	20
<b>Producer</b>	MY WAY METAL DIS TICARET LTD.STI