


# Drain: Camin PP BASE patrat Gri tip I A15-C250 400x400 (8472I-G)

## 8472I-G

**400 mm**  
HOSSZ

**395 mm**  
MAGASSÁG

**400 mm**  
SZÉLESSÉG

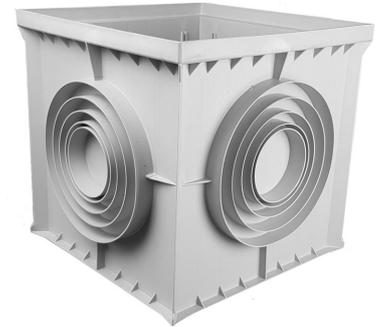

### FELHASZNÁLÁS:

Manholes from the BASE range are used for pedestrian surfaces, in areas intended for pedestrians and cyclists.

### MINŐSÉGI FELTÉTELEK:

- EU Regulation No. 305/2011
- SR EN 13598-1

### ELŐNYÖK:

- Easy to handle and install
- UV resistant
- Various installation widths and heights
- Can be used with A15-C250 class gratings

### TERMÉKGARANCIA:

- 24 months - subject to compliance with assembly, storage and operation instructions.

## SZERELÉS

The BASE range of manholes allows for direct connection of pipes. Connections are made quickly and easily, with the connection slots being factory-prepared for coring. Detachment is easy and does not require special cutting equipment.

**!** For efficient installation, we recommend using G12M29-C sealant. It is used for sealing gutters, pipes and drainage systems;




- Curing time: 24h/2-3 mm
- Temperature resistance: -40° C to +70° C
- Processing temperature: +5° C to +40° C

BASE sealing paste (sealant) PP-FB-PB gutters, tube, 310 ml (G12M29-C)



## Tartozékok 8472I-G

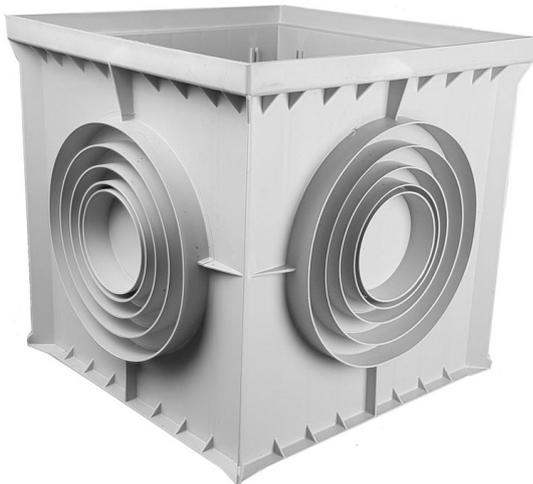

## JELLEMZŐK

<b>Termék neve</b>	Camin PP BASE patrat Gri tip I A15-C250 400x400 (8472I-G)
<b>Termékkód</b>	8472I-G
<b>EAN kód</b>	6426282033903
<b>Termékkategória</b>	Cămine plastic BASE (A15-C250)
<b>Brand</b>	Drain
<b>Súly</b>	1.50 kg
<b>Készlet elérhetősége</b>	Tárolható
<b>Hossz, mm</b>	400
<b>Szélesség, mm</b>	400
<b>Magasság (M), mm</b>	395.00
<b>Csőcsatlakozás (DN)</b>	DN100, DN125, DN160, DN250
<b>Ereszcsatorna-csatlakozás (LN)</b>	-
<b>Terhességi osztály</b>	A15
<b>Termék anyaga</b>	Polipropilén
<b>Grill Anyaga</b>	Polipropilén
<b>Szín</b>	Szürke
<b>Gyártói kód</b>	8472I-G
<b>Rácsrögzítő rendszer</b>	Kattintás
<b>Garancia, hónap</b>	24
<b>Termelő</b>	SIME GROUP TRADING S.R.L.