


# Drain: Gratar PP BASE Gri grila pt camin patrat tip I A15 400x400 (88472I-G)

## 88472I-G

**380 mm**  
HOSSZ

**25 mm**  
MAGASSÁG

**380 mm**  
SZÉLESSÉG

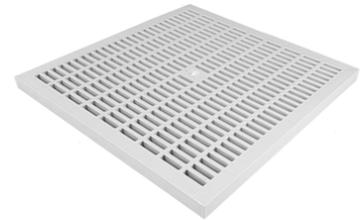

### FELHASZNÁLÁS:

Polypropylene grates are used in storm sewer networks and for covering manholes in sewer networks and installations located in pedestrian areas with light traffic.

### MINŐSÉGI FELTÉTELEK:

- SR EN 124-6
- EU Regulation No. 305/2011
- Declaration of Conformity

### ELŐNYÖK:

- Durability;
- Aesthetic design;
- Balanced ratio between load class and product weight;
- Warranty (2 years)

### TERMÉKGARANCIA:

- 20 years - subject to compliance with assembly, storage and operation instructions.

## SZERELÉS

Installation and commissioning will only be carried out in areas compliant with the product's load class, A15: pedestrian areas, with light traffic. Commissioning will be carried out by specialized personnel.

 For efficient installation, we recommend using G12M29-C sealant. It is used for sealing gutters, pipes and drainage systems.

- Curing time: 24h/2-3 mm
- Application temperature: +5° C to +40°C
- Maximum storage temperature: 32°C



BASE sealant, construction products, 310 ml tube (G12M29-C).



**JELLEMZŐK**

|                         |   |
|-------------------------|---|
| <b>Termék neve</b>      | Gratar PP BASE Gri grila pt camin patrat tip I A15 400x400 (88472I-G) |
| <b>Termékkód</b>        | 88472I-G  |
| <b>EAN kód</b>          | 6426282033910   |
| <b>Termékkategória</b>  | Accesorii BASE  |
| <b>Brand</b>            | Drain   |
| <b>Súly</b>             | 2.00 kg   |
| <b>Hossz, mm</b>        | 380   |
| <b>Szélesség, mm</b>    | 380   |
| <b>Magasság (M), mm</b> | 25  |
| <b>Elosztó</b>          | Vodaland Balkan SRL   |
| <b>Termék anyaga</b>    | Polipropilén  |
| <b>Szín</b>             | Szürke  |
| <b>Termelő</b>          | SIME GROUP TRADING S.R.L.   |