

# Clean: Separator GRASIMI GRP GPro 2.0LS D1200 H1400 TN400L IN/OUT Ø110 (SGGLEM2LS)

## SGGLEM2LS

**1200 mm**  
ÁTMÉRŐ

**1400 mm**  
MAGASSÁG/HOSSZ



### FELHASZNÁLÁS:

GRP GREASE separators can be used in several areas of use:

- pre-treatment of water infected with vegetable or animal fats
- water from kitchens; factories; food industry production units;
- prevents clogging of sewage networks with fat deposits.

### MINŐSÉGI FELTÉTELEK:

- Declaration of Performance
- In accordance with EU Regulation 305/2011
- ISO 9001

### ELŐNYÖK:

- Different volumes for customized applications;
- Easy and fast installation and assembly;
- Optimized dimensions for transport;
- Allow the separator to be disassembled into segments, thus allowing easier handling during transport or on site.

### TERMÉKGARANCIA:

- Warranty 2 years
- Lifespan 50 years

## SZERELÉS

The assembly and commissioning are carried out according to the instructions provided by the manufacturer. This product is installed in pedestrian and road areas.

All optional accessories of the product will be sealed with mastic.





**!** For efficient installation, we recommend using G12M29-C sealant.

It is used for sealing gutters, pipes and drainage systems;






- Curing time: 24h/2-3 mm
- Temperature resistance: -40° C to +70° C
- Processing temperature: +5° C to +40° C



- BASE sealant, construction products, 310 ml tube (G12M29-C)

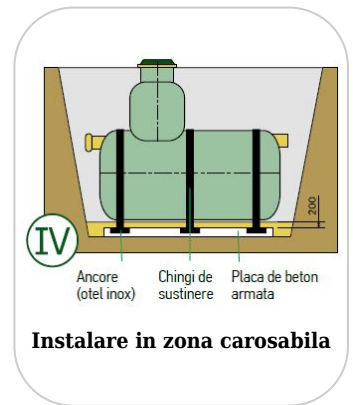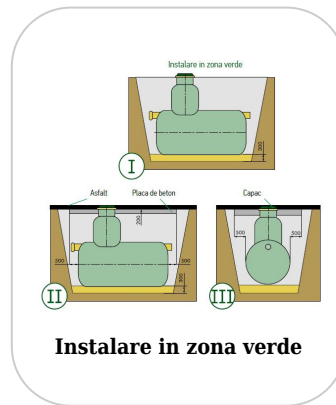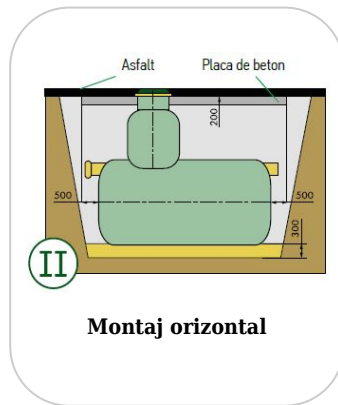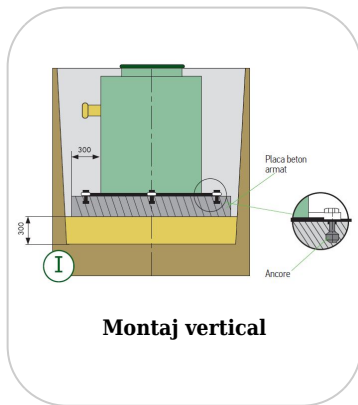

## Tartozékok SGGLEM2LS

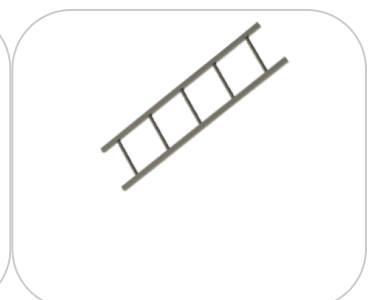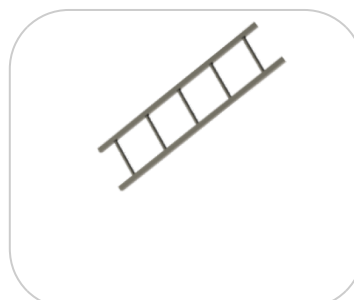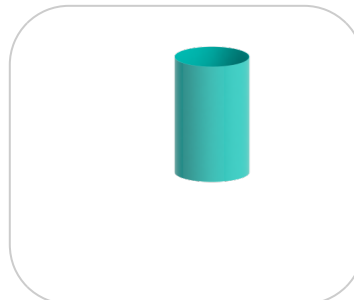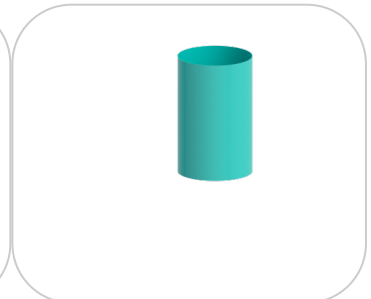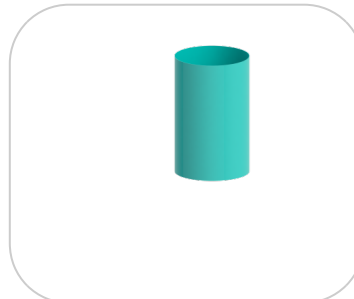

No. crt.	Model / Coding	Nominal flow rate (l/s)	Diameter (mm)	Separator height (mm)	Inlet/outlet connection diameters	Calculated useful volume (liters)	Volumul Grasimi (liters)	Sludge trap volume (liters)
1	SGGLEM1LS	1	800	1430	110/110	603	95	206
2	SGGLEM2LS	2	1200	1400	110/110	1244	220	413
3	SGGLEM3LS	3	1400	1600	110/110	1847	295	630
4	SGGLEM4LS	4	1600	1650	110/110	2413	385	823
5	SGGLEM5LS	5	1800	1750	160/160	3308	555	1041
6	SGGLEM7LS	7	2000	1850	160/160	4398	685	1424
7	SGGLEM10LS	10	2400	1930	160/160	4660	990	2050

## JELLEMZŐK

<b>Termék neve</b>	Separator GRASIMI GRP GPro 2.0LS D1200 H1400 TN400L IN/OUT Ø110 (SGGLEM2LS)
<b>Termékkód</b>	SGGLEM2LS
<b>EAN kód</b>	6427669005131
<b>Termékkategória</b>	Separatoare Grasimi GRP
<b>Brand</b>	Clean
<b>Súly</b>	165.00 kg
<b>Készlet elérhetősége</b>	Egyedi gyártású
<b>Magasság (M), mm</b>	1400
<b>Belső átmérő / hézag (mm)</b>	620
<b>Bemeneti csatlakozó átmérője (DNin) mm</b>	110
<b>Kimeneti csatlakozó átmérője (DNout) mm</b>	110
<b>Termék anyaga</b>	Üvegszállal erősített poliészter (PAFS/GRP)
<b>Névleges áramlási sebesség (Q, l/s)</b>	2
<b>Teljes térfogat (Vt, liter)</b>	1583
<b>Hasznos térfogat (Vu, liter)</b>	1244
<b>Zsírmennyiség (Vg, liter)</b>	220
<b>Iszapfogó, (liter)</b>	413
<b>Rögzítőrendszer</b>	
<b>Garancia, hónap</b>	24
<b>Termelő</b>	FIBERICA