


Drain: Rigola PB MONO LN300 Hext.610 cu iesire verticala DN250 F900 1000x385x610 (7790609/610)

7790609/610

1000 mm
LENGTH

610 mm
HEIGHT

385 mm
WIDTH

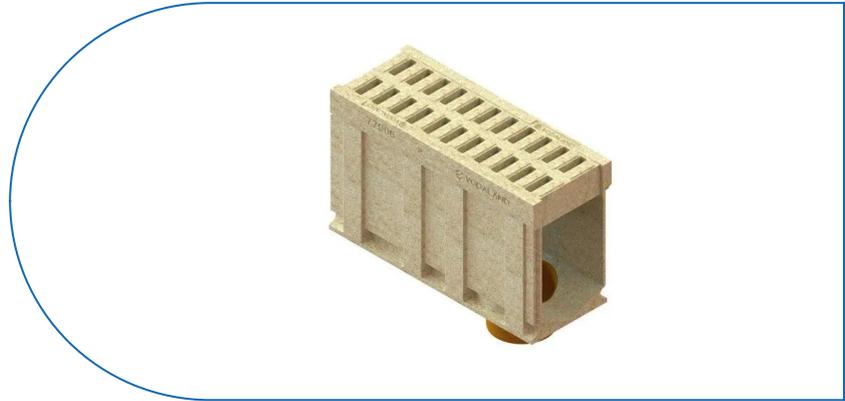

USAGE:

MONO polymer concrete gullies, class F900, are designed for heavy traffic, being used in airports, runways and military terminals.

QUALITY CONDITIONS:

- According to SR EN 1433:2003
- According to EU Regulation No. 305/2011
- Declaration of Performance

ADVANTAGES:

- Easy to handle and install
- UV resistant
- Various widths and installation heights
- Use in areas with very intense traffic
- Long service life

LIFESPAN:

- 20 years - subject to compliance with assembly, storage and operation instructions.

INSTALLATION

The gutter drainage system can be installed without a collector chamber because both ends of the gutter can be sealed with end pieces, and the discharge point to the sewer network will be made through the vertical connection of the gutter.

 For efficient installation, we recommend using G12M29C sealant. It is used for sealing gutters, pipes and drainage systems.



- Curing time: 24h/2-3 mm
- Application temperature: +5° C to +40°C
- Maximum storage temperature: 32°C

BASE sealant, construction products, 310 ml tube (G12M29-C).

CHARACTERISTICS

Product name	
Product code	7790609/610
EAN code	6427669030669
Product category	Rigole MONOBLOC
Brand	Drain
Weight	178.20 kg
Stock availability	Stockable
Length, mm	1000
Exterior width, mm	385
Nominal Length, mm	LN300
Exterior Height, mm (Hext)	610
Interior Height, mm (Hint)	570
Channel connection(LN)	300
Load class	F900
Channel material	Polimerbeton
Warranty, months	24
Lifespan, years	20
Producer	VODALAND INDUSTRY LLC