


# Drain: Set 6 ml rigole drenaj PP EASY 1 LN100 Hext.90 gratar PP A15 cu accesorii 6000x90x90 (S088081M-6)

## S088081M-6

**6000 mm**  
LENGTH

**90 mm**  
HEIGHT

**90 mm**  
WIDTH

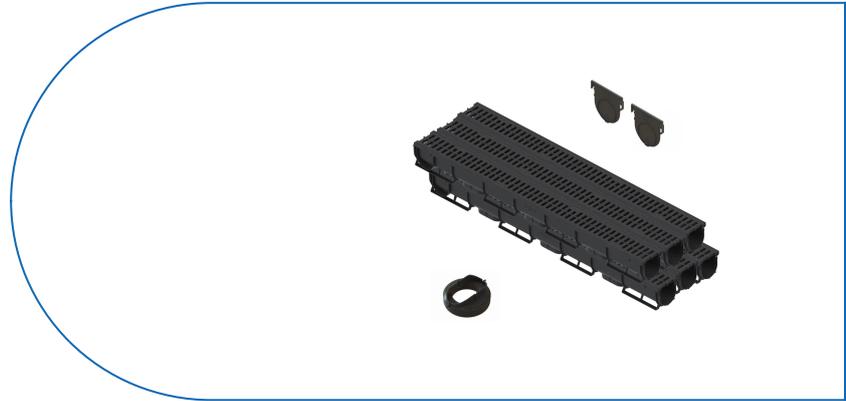

### USAGE:

The set of 6 linear meters of channels from the EASY range are designed for use in pedestrian areas and cycling routes with low traffic intensity. Due to their constructive characteristics, they are ideal for applications in private and residential constructions, easily integrating into modern and functional layouts.

### QUALITY CONDITIONS:

- Compliant with SR EN 1433:2003
- Compliant with EU Regulation No. 305/2011
- Declaration of performance

### ADVANTAGES:

- Easy to handle and install
- UV-resistant
- Use in residential areas or private homes
- Long lifespan

### LIFESPAN:

- 20 years - with proper installation, storage, and usage according to instructions.

## INSTALLATION

The 6-linear-meter drainage system can be installed without a collector chamber, as both ends of the drainage channel can be closed with end pieces. The discharge point to the sewage network will be made through the vertical connection of the channel. For the correct operation and durability of the system, it is recommended to strictly follow the installation instructions provided by the manufacturer, as well as to have the installation work carried out by qualified and authorized personnel. Correct installation guarantees the optimal performance of the drainage system and prevents any problems arising during operation.




For efficient installation, we recommend using the G12M29-C sealant. It's used for sealing channels, pipes, and drainage systems.



- Curing time: 24h/2-3 mm
- Operating temperature: +5°C to +40°C
- Maximum storage temperature: 32°C

BASE sealant, construction products, 310 ml tube (G12M29-C).

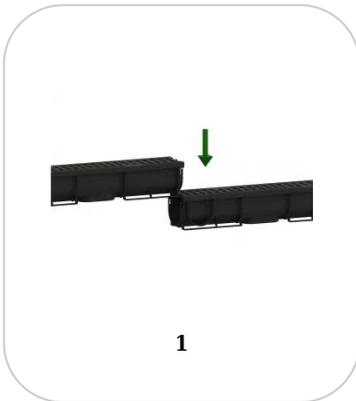

## Accessories S088081M-6



**CHARACTERISTICS****Product name****Product code**

S088081M-6

**EAN code**

6427669038450

**Product category**

Rigole plastic Easy 1

**Brand**

Drain

**Weight**

4.50 kg

**Stock availability**

Stockable

**Length, mm**

6000

**Exterior width, mm**

90

**Nominal Length, mm**

LN100

**Exterior Height, mm (Hext)**

90

**Interior Height, mm (Hint)**

85

**Load class**

A15

**Channel material**

Polypropylene

**Grate Material**

Polypropylene

**Grate fastening system**

Click

**Warranty, months**

24

**Lifespan, years**

20

**Producer**

VODALAND INDUSTRY LLC