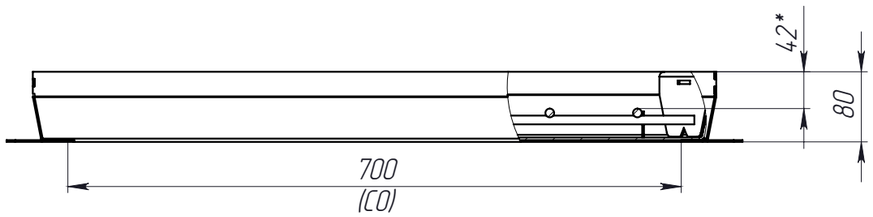

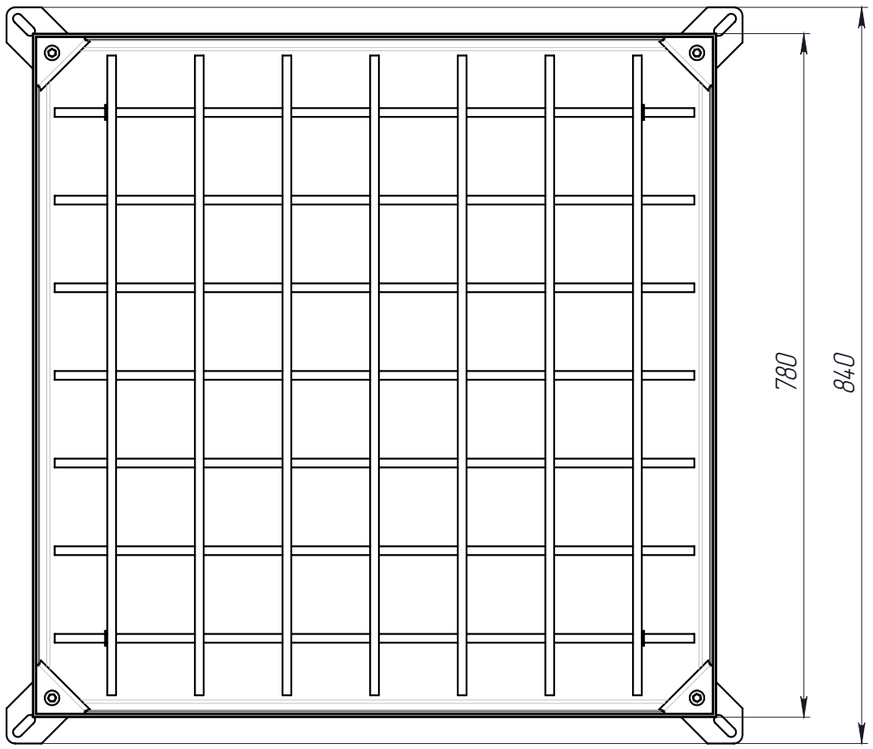

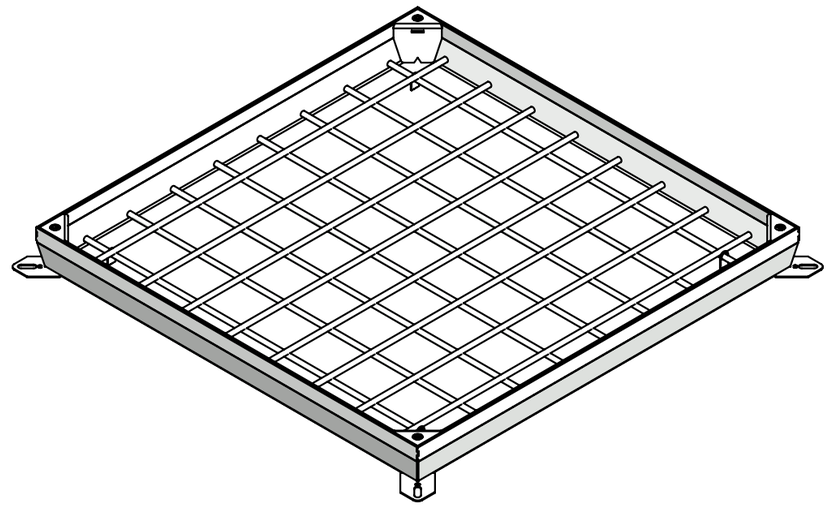

1. *Dimensions for reference*
2. *Hot dip galvanised according to ISO 1461:2009*
3. *The appropriate class is achieved by filling the lid with concrete of the appropriate grade (C35/45) according to the installation recommendations*
4. *Delivery and packaging are carried out in accordance with the terms of the contract*
5. *The manufacturer reserves the right, without notice to the consumer, to make changes to the design of the products for improvement of their technological and operational parameters, which will not affect the quality and properties of the product.*

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: ISO 2768-m LINEAR: ANGULAR:		FINISH: Hot dip galvanized			DEBURR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING	REVISION V.2
	NAME	SIGNATURE	DATE			VODALAND	
DRAWN	Halushka		10.07.23			TITLE: Galvanized Steel Access Cover Pro 700x700 Unifill H80 B125 Load class B125	
CHK'D							
APPV'D							
MFG							
Q.A				MATERIAL: Galvanized Steel		ARTICLE: 30417.8-3	A3
				WEIGHT: 33.26 kg		SCALE:1:7	SHEET 1 OF 1