

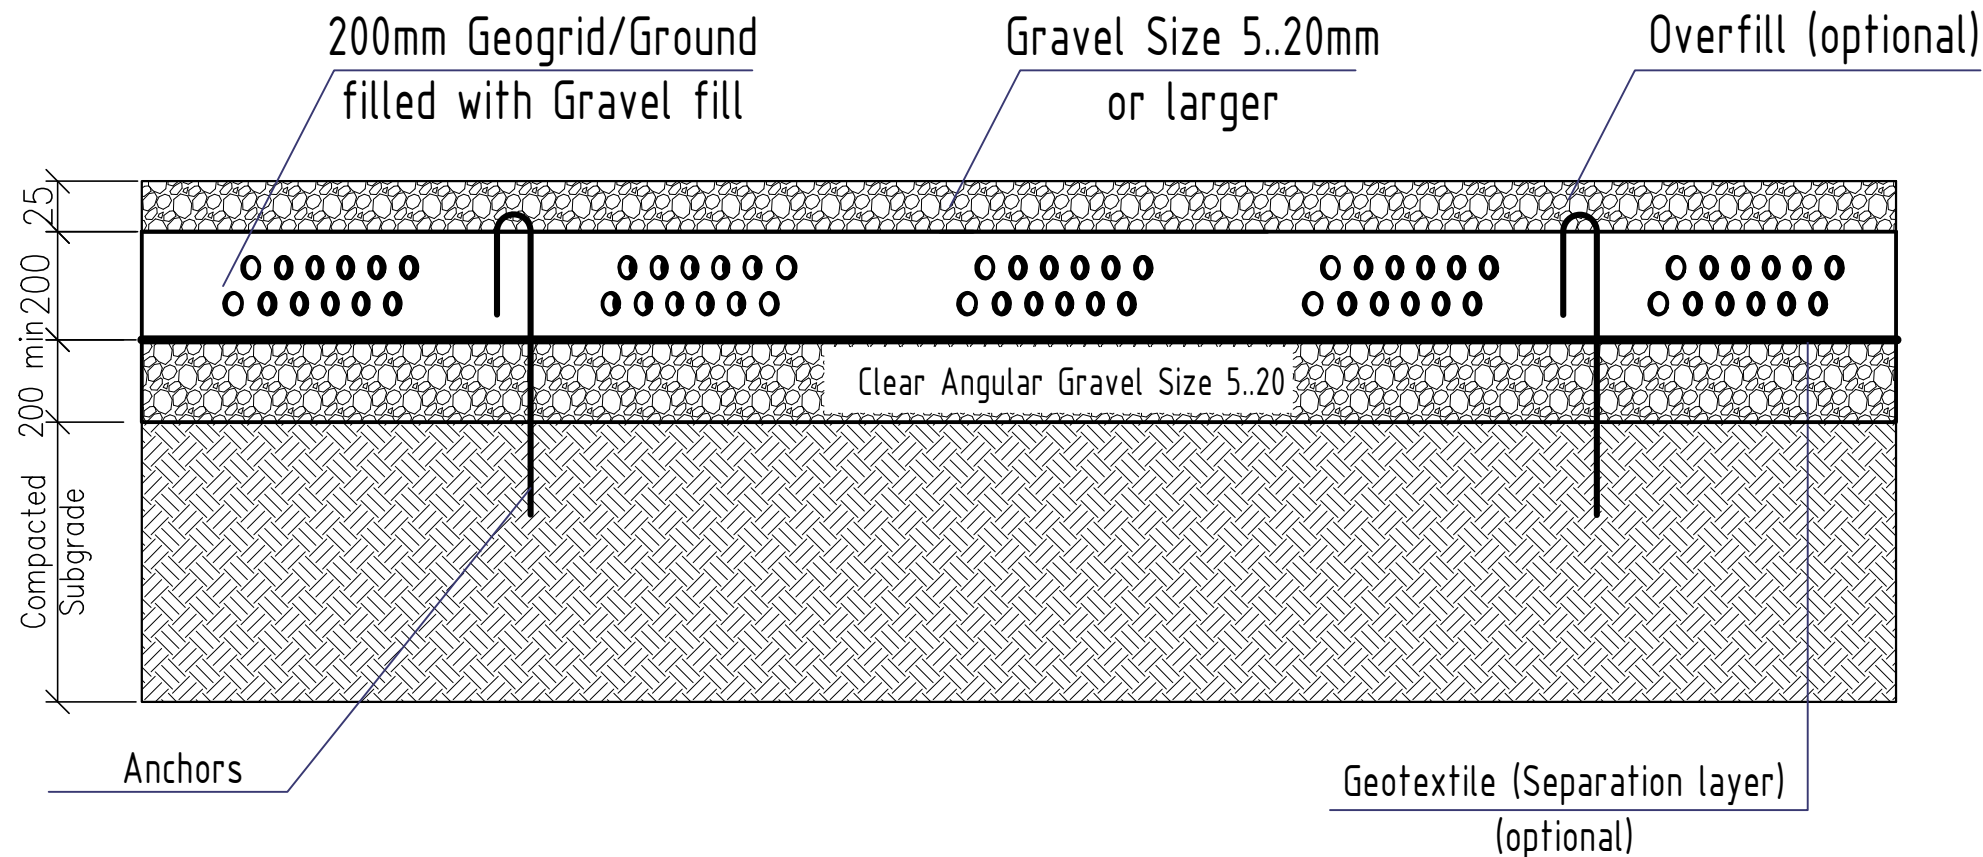


# 200mm GCE / GROUND GRID (Load Class A-D) Gravel fill

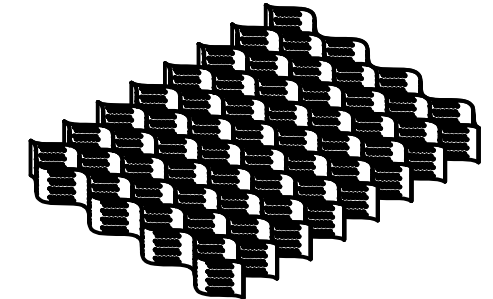

GCE / Ground Grid (art.8720)

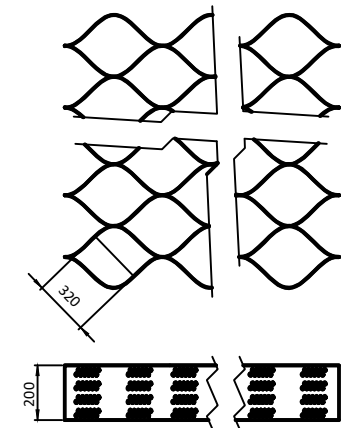


**NOTES:**

1. Please note, to be able to drive on this system, it must be filled with 5..20mm gravel or larger.
2. 200mm GCE / ground grid system should be installed in accordance with the manufacturer's instructions and recommendations.
3. The manufacturer's technical consultation may be required to determine the correct load class and subbase depth.
4. The drawing of installation for the 200mm GCE / ground grid system is not an official guideline, but is a recommendation.
5. Layers shown in cross-section need to be compacted.
6. Geo-textile is to be used for stability and to prevent mixing between layers.
7. We recommend anchors on each corner of the grid, and throughout the perimeter. Needed on sloped installations, mostly. The plastic anchor is used for soft rocks of the base, J-hook rebar for hard rocks base.
8. Follow for updates to the instructions and recommendations on the website [vodaland.com.ua](http://vodaland.com.ua)


**Application**

heavy duty driveways/parking, retaining walls, high traffic areas, heavy shed base, swim spa/pool base, extreme slope erosion control up to 45 degrees



UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS		FINISH:		DEBURR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		REVISION	
SURFACE FINISH:								TITLE: 200mm GCE / ground grid (Load Class A-D)	
TOLERANCES:									
LINEAR:									
ANGULAR:									
DRAWN:		SIGNATURE:		DATE:		MATERIAL:		ARTICLE:	
CHK'D:						Plastic HDPE		8720	
APPV'D:									
APPV'D:									

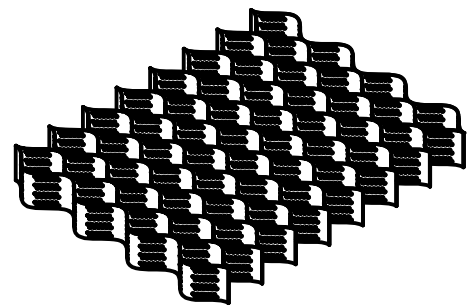

# 200mm GCE / GROUND GRID (no loads) Grass fill

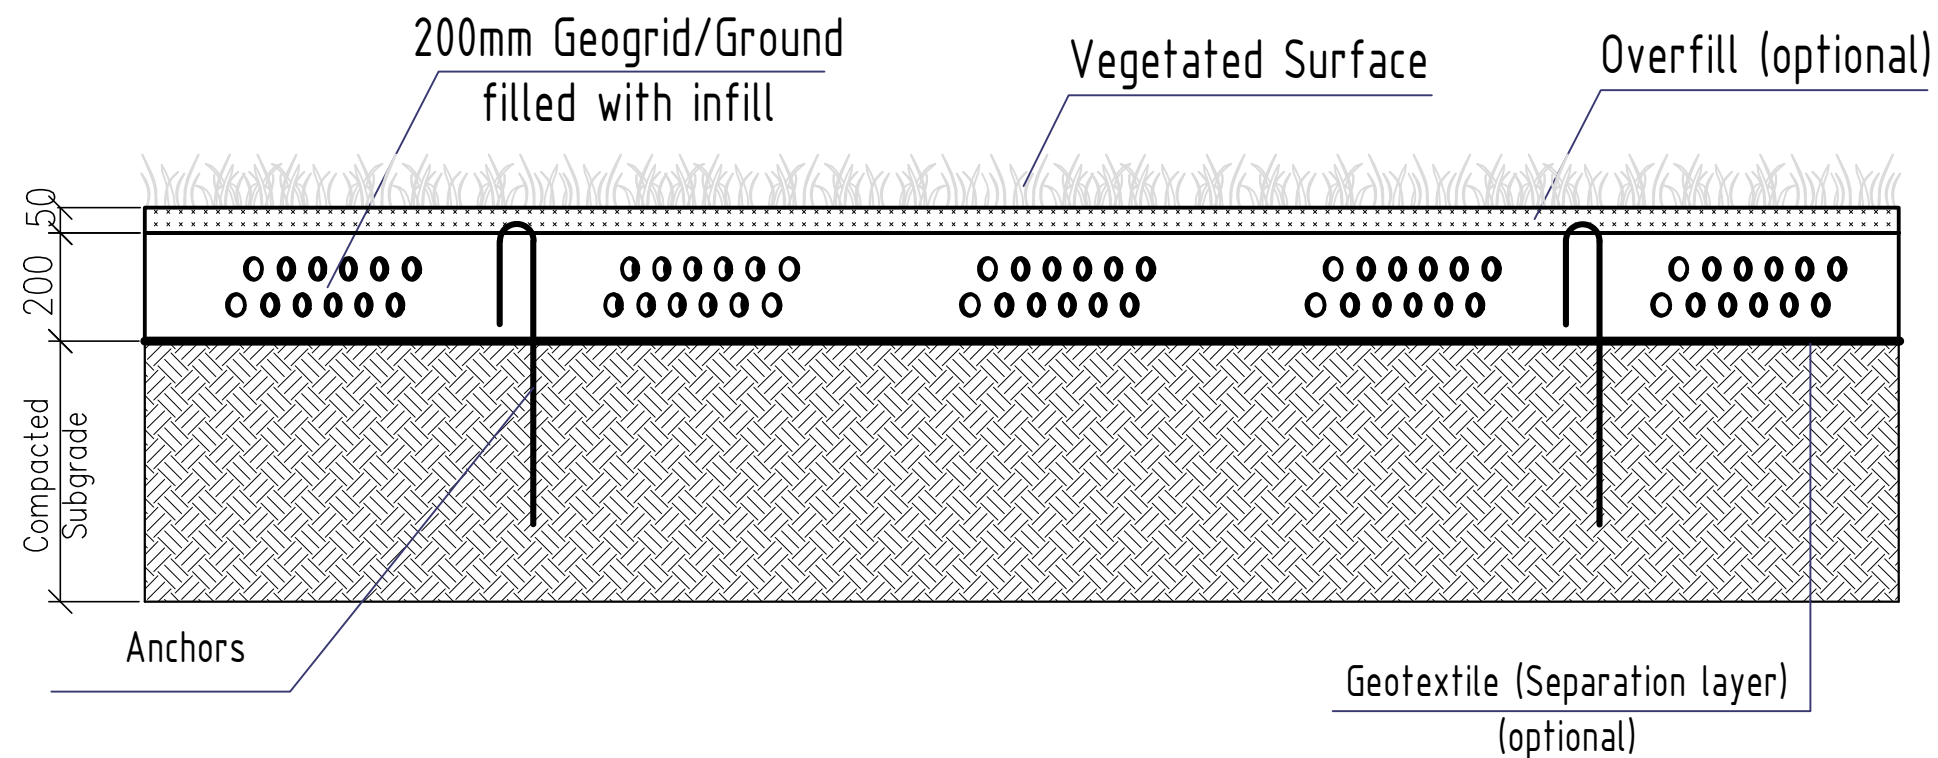

GCE / Ground Grid (art.8720)

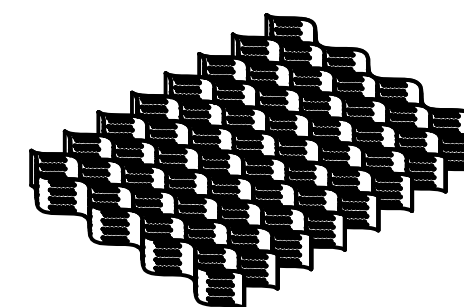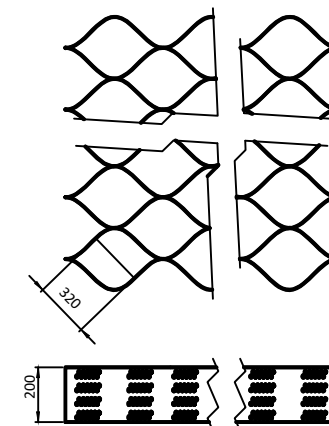

## NOTES:

1. 200mm GCE / ground grid system should be installed in accordance with the manufacturer's instructions and recommendations.
2. The manufacturer's technical consultation may be required to determine the correct load class and subbase depth.
3. The drawing of installation for the 200 GCE / ground grid system is not an official guideline, but is a recommendation.
4. Layers shown in cross-section need to be compacted.
5. Geo-textile is to be used for stability and to prevent mixing between layers.
6. We recommend anchors on each corner of the grid, and throughout the perimeter. Needed on sloped installations, mostly. The plastic anchor is used for soft rocks of the base, J-hook rebar for hard rocks base.
7. Follow for updates to the instructions and recommendations on the website [vodaland.com.ua](http://vodaland.com.ua)

## Application

erosion control, garden beds, slope lawns and terrain up to 45 degrees

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS		FINISH		DEBURR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		REVISION	
SURFACE FINISH: TOLERANCES: LINEAR ANGULAR									
DRAWN		SIGNATURE		DATE		TITLE:			
CHK'D						200mm GCE / ground grid (no loads)			
APPV'D						MATERIAL:		ARTICLE:	
						Plastic HDPE		8720	