





- 50mm GCE / ground grid system should be installed in accordance with the manufacturer's 1. instructions and recommendations.
- The manufacturer's technical consultation may be required to determine the correct load 2. class and subbase depth.
- 3. The drawing of installation for the 50mm GCE / ground grid system is not an official guideline, but is a recommendation.
- Layers shown in cross-section need to be compacted. 4.
- Geo-textile is to be used for stability and to prevent mixing between layers. 5.
- We recommend anchors on each corner of the grid, and throughout the perimeter. 6. Needed on sloped installations, mostly. The plastic anchor is used for soft rocks of the base, J-hook rebar for hard rocks base.
- Follow for updates to the instructions and recommendations on the website vodaland.com.ua 7.

up to 10 degrees


unless otherwise specified) Dimensions are in millimeters Surface finish Ulrear: Linear: Angular:			FINISH		
	NAME	SIG	NATURE	DATE	I
Dravn					T
CHK'D					Ι
APPV'D					Ι
APPV'D					T
					ľ
					1
				Ī	1
				1	Ť

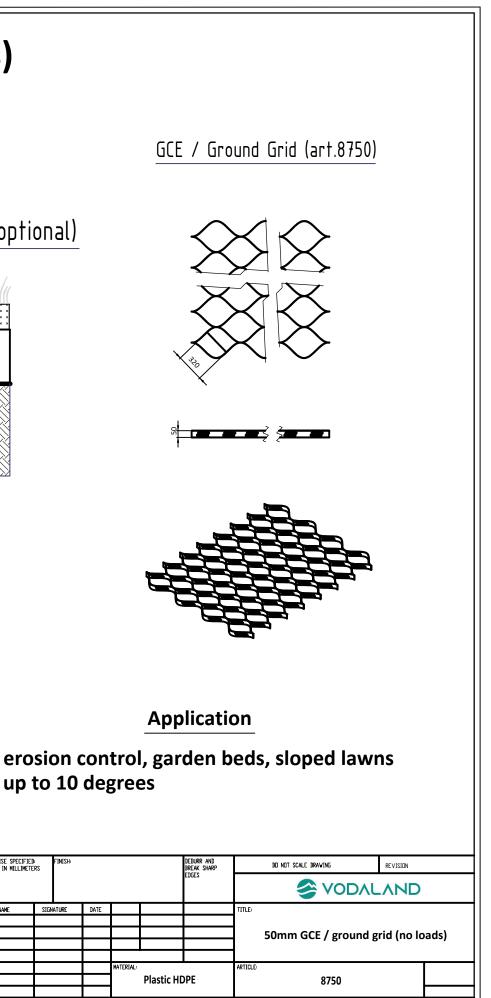


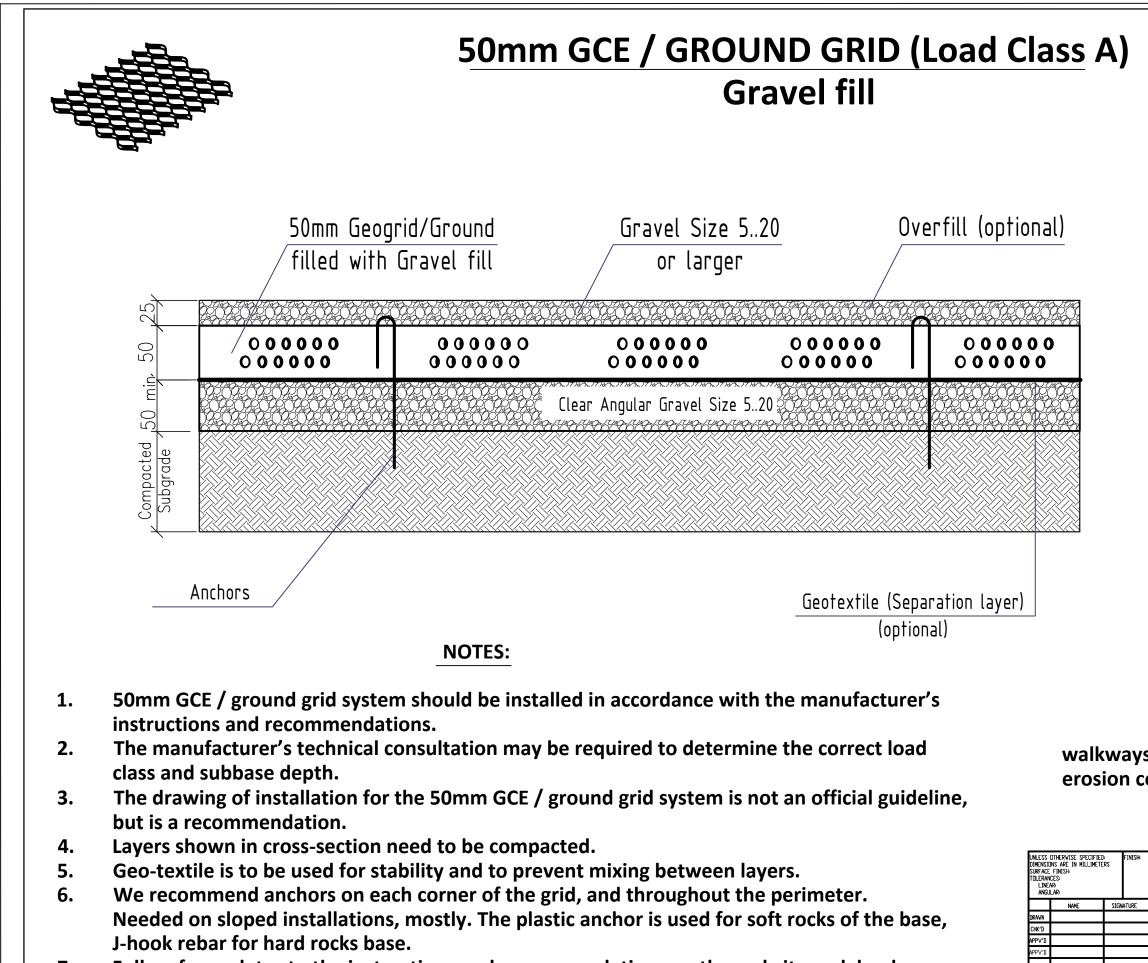

Follow for updates to the instructions and recommendations on the website vodaland.com.ua 7.



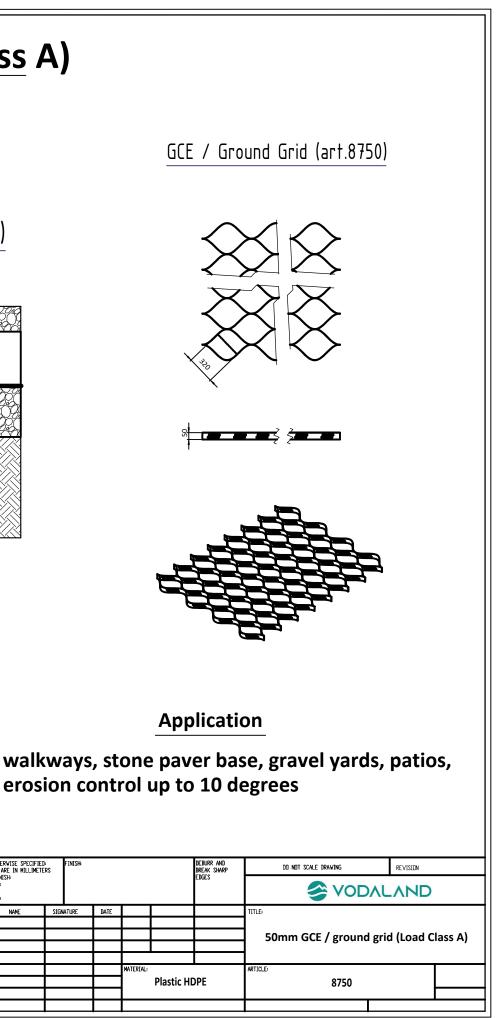

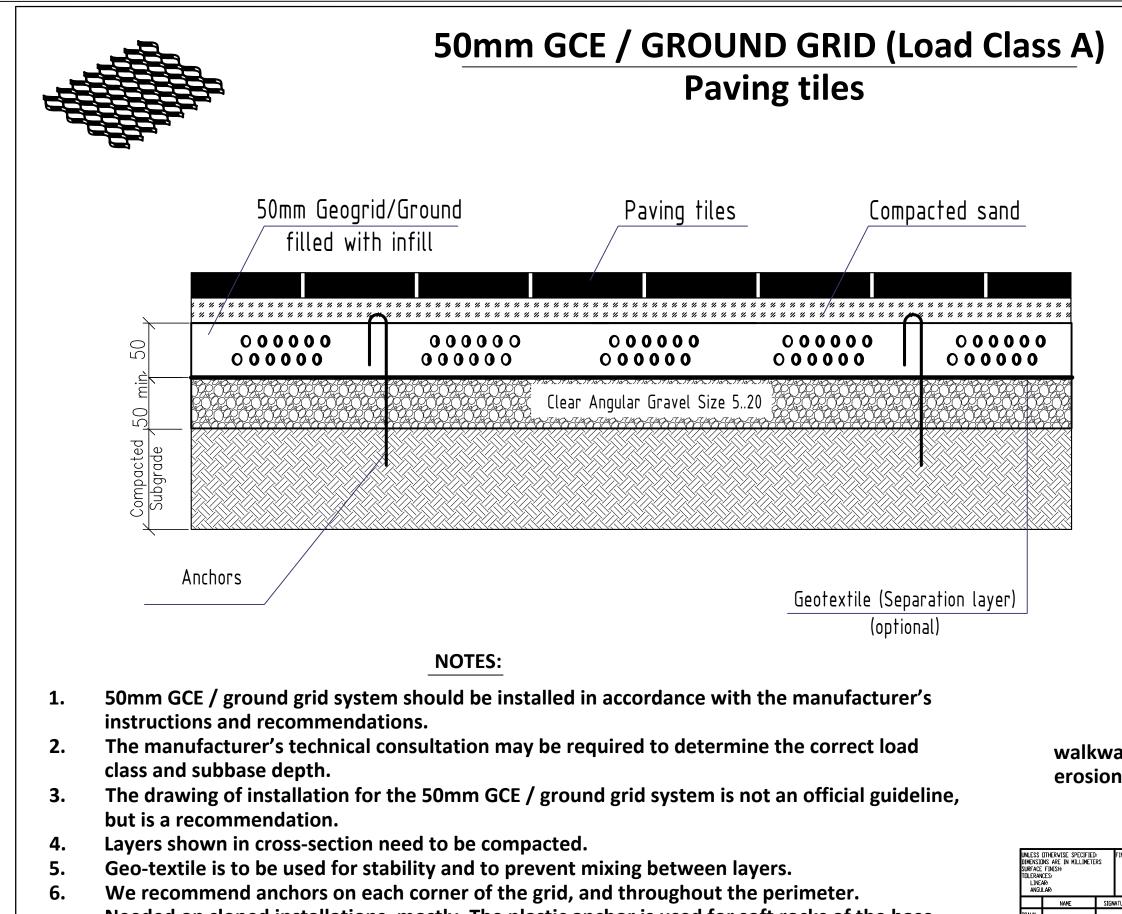

- Needed on sloped installations, mostly. The plastic anchor is used for soft rocks of the base, J-hook rebar for hard rocks base.
- Follow for updates to the instructions and recommendations on the website vodaland.com.ua 7.

UNLESS OTHERVISE SPECIFIED: FINISH DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH TOLERANCES: LINEAR ANGULAR	
NAME SIGNATURE	DATE
DRAVN	
CHK'D	
APPV'D	
APPV'D	
	\Box

