


Grease separator GEasy100-7 (S1:25)



3D visualization

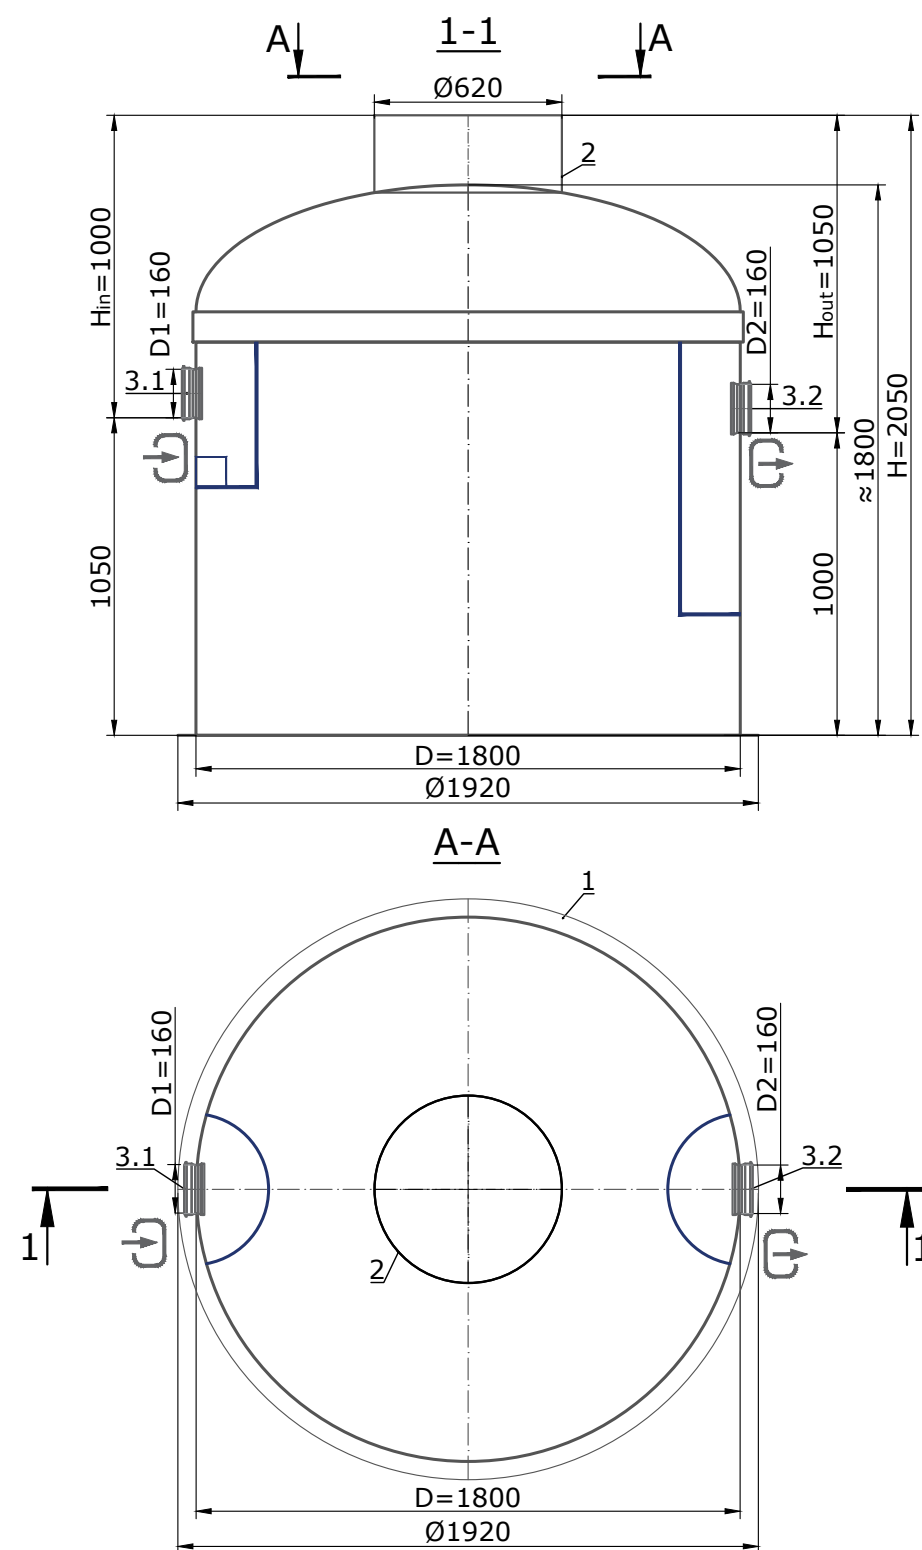


Specification of materials and equipment.
Standard equipment**(Table 1)

Pos.	Name	Q-ty	Mass, kg	Note
1	Grease separator Vodaland GreaseEasy100-7, flow rate-7 l/s, fiberglass, D=1800, H=2050	1	262 ±12%	compl.
2	Manhole extension GRP Ø620	1		compl.
3.1, 3.2	Rubber seal for connection PVC SN4 Ø160	2		compl.
	Grease storage capacity	340		L
	Silt storage capacity	700		L
	Usable storage capacity	2540		L

**The product is shipped in accordance with the Standard equipment, unless otherwise specified in the Additional equipment

Additional equipment (Table 2)

☐ Fiberglass lid Ø620 	☐ Plastic manhole cover, class A 	☐ Cast manhole, class: ☐ B ☐ C ☐ D 
☐ Neck extension Ø620:  ☐ h=500mm ☐ h=1000mm ☐ h=1500mm	☐ Fiberglass adaptor plate Ø620 	☐ Universal ladder 
☐ Level sensor set: ☐ Sludge  ☐ Light liquids  ☐ Max level 		

Note:
*This is a standard drawing (Hin=1000mm; D; Din/Dout) that can be customized on request as individual product
**The manufacturer reserves the right to make design and schematic changes that do not impair the characteristics of the product as a whole
***Permissible deviation during production of products is 1-3%

Additional equipment:

Grease separator Vodaland
GreaseEasy100-7



Factory ID: GE1-7
Material: reinforced fiberglass Date: 02/2026

