

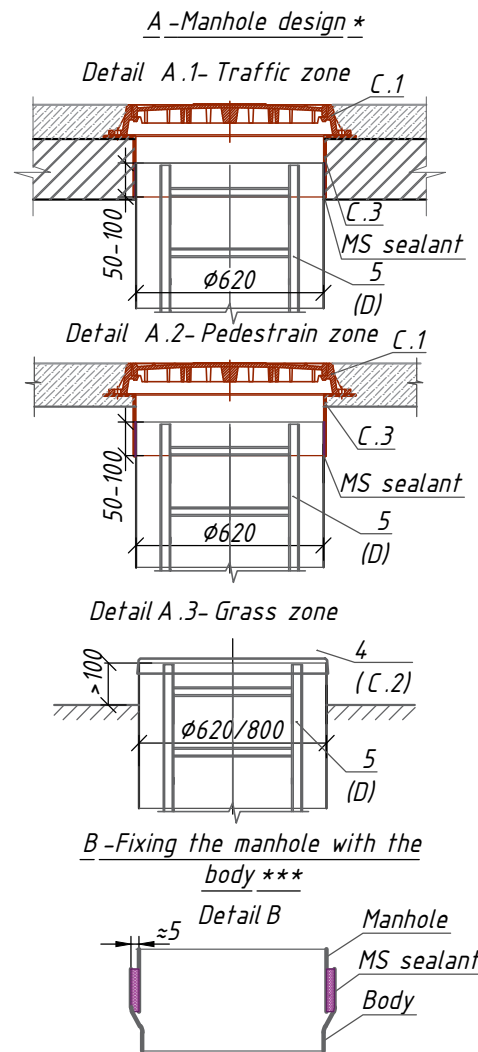


Grease Separator Vodaland GBase-10 with sludge trap (S1:30)

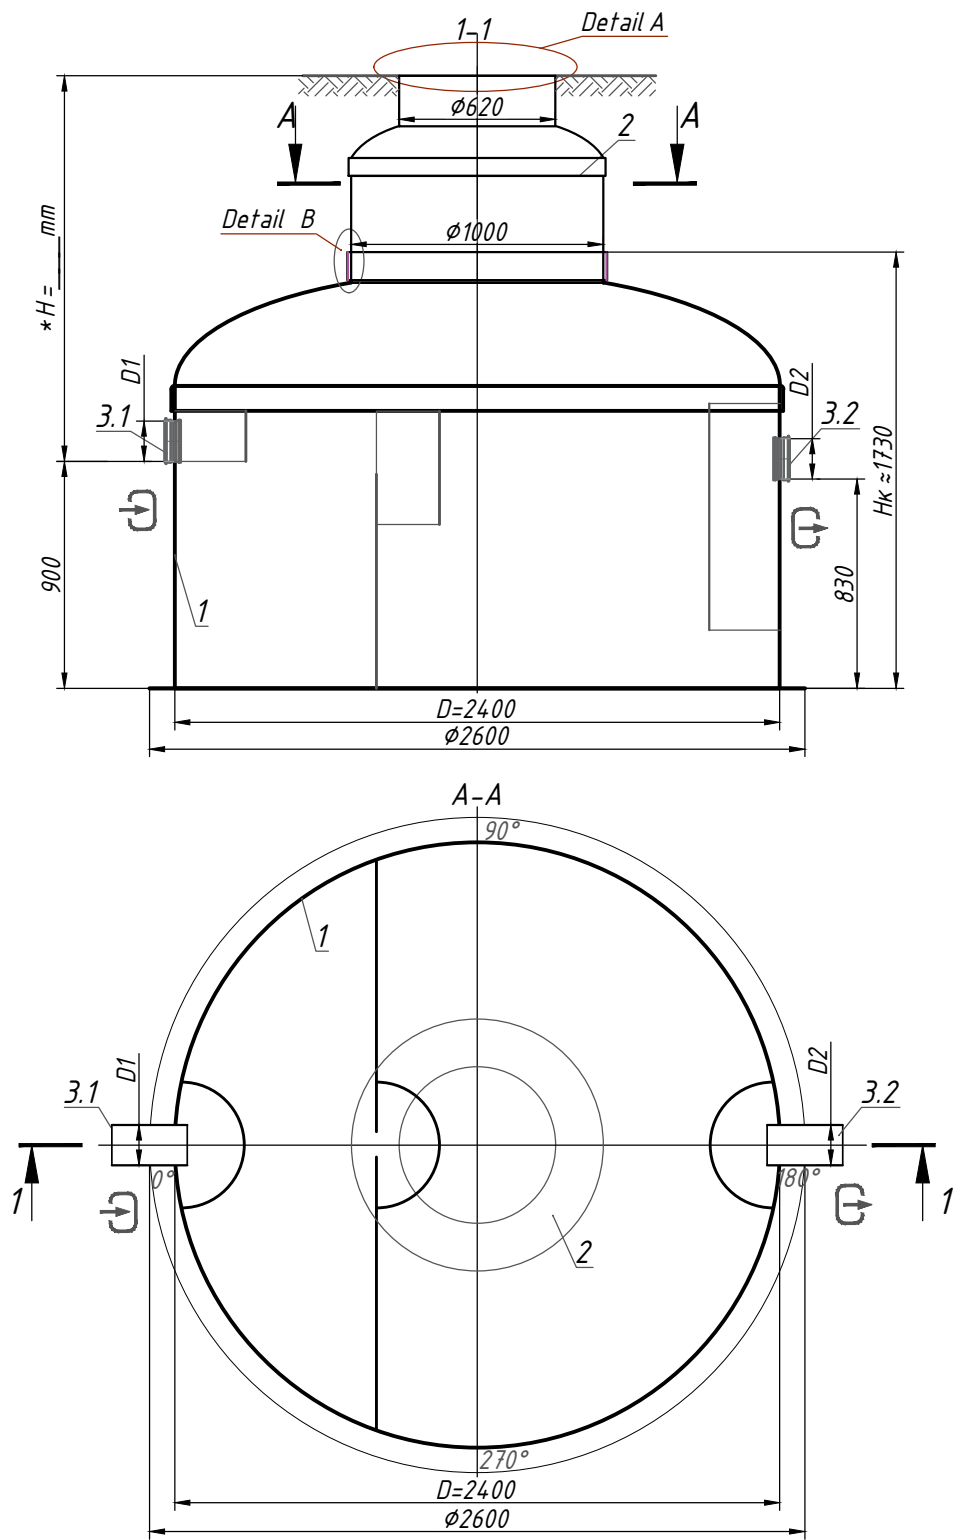

C - Pipes location D1- inlet / D2- outlet on plan

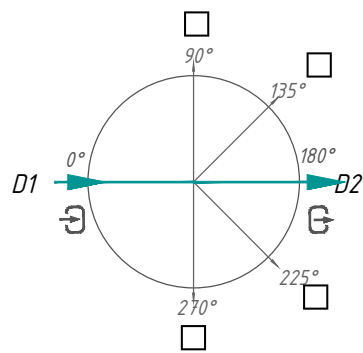

Specification of materials and equipment. Standard equipment ** (Tabl. 1)

Pos.	Identification	Name	Q-ty	Mass pc., kg	Note
1	Vodaland	Grease Separator Vodaland GreaseBase-10 with sludge trap, fiberglass disch. 10 l/s, D=2400 Hk=1730	1	585	compl.
2		Inspection manhole $\phi 1000 \times 620$	1		compl.
3.1	D1-Inlet pipe	Rubber seal for connection PVC SN4 $\phi 160$	1		compl.
3.2	D2-Outlet pipe	Rubber seal for connection PVC SN4 $\phi 160$	1		compl.
		Volume of light liquids	1100		l
		Volume of sludge trap	1440		l

** The product is shipped in accordance with the Standard equipment (Tabl. 1), unless otherwise specified in the Additional equipment (Tabl. 2)

Additional equipment (Tabl. 2)

Pos.	Identification	Name			Note	
A, B	D1-Inlet pipe / D2-Outlet pipe:					
	For connection D1, D2:		Funnel	<input type="checkbox"/>	<input type="checkbox"/>	
			Smooth end	<input type="checkbox"/>	<input type="checkbox"/>	
			Another:	<input type="checkbox"/>	<input type="checkbox"/>	
	Diameter D pipes D1, D2:		$\phi 90$	<input type="checkbox"/>	<input type="checkbox"/>	
		$\phi 160$	<input type="checkbox"/>	<input type="checkbox"/>		
		Another:	<input type="checkbox"/>	<input type="checkbox"/>		
C	Manhole design (see A.1, A.2)					
	C.1 Cover:	Garden plastic	<input type="checkbox"/>			
		Load class A 15	<input type="checkbox"/>			
		Load class C 250	<input checked="" type="checkbox"/>			
	C.2	Load class D 400	<input type="checkbox"/>			
Fiberglass cover $\phi 620$		<input type="checkbox"/>				
C.3 Fiberglass adaptor plate $\phi 620, h=200\text{mm}$		<input checked="" type="checkbox"/>				
	Another:	<input type="checkbox"/>				
D	D. Universal ladder		Aluminium	<input type="checkbox"/>		
			s/s	<input type="checkbox"/>		
E	E. Level sensor		Oil	<input type="checkbox"/>		
			Sludge	<input type="checkbox"/>		
F	F. Fastening		Belt fastening for D 2400	<input type="checkbox"/>		

Note:

*H-depth of the inlet connection, mm (in standard equipment H up to 2000 mm). H take a multiple of 50mm.
 When filling the manhole A.1 - the overall height of the product is less than 200mm; at the design of the manhole A.2 - the total height of the product is bigger than 100 mm.
 **The product is shipped in accordance with the Standard equipment (Tabl. 1), unless otherwise specified in the Additional equipment (Tabl. 2). The complete set of the product agrees with the manager.
 ***The manufacturer has the right to make constructive and pattern changes that do not worsen the characteristics of the product as a whole
 Permissible deviation during production of products is 1-3%.

Additional equipment: _____

Chan.	Q-ty	Sheet	Nºdoc.	Signature	Date	Phase	Sheet	Sheets
						Grease Separator Vodaland GBase-10 (GB-10)		

