

Grease Separator Vodaland GBase-3 with sludge trap (\$1:20)

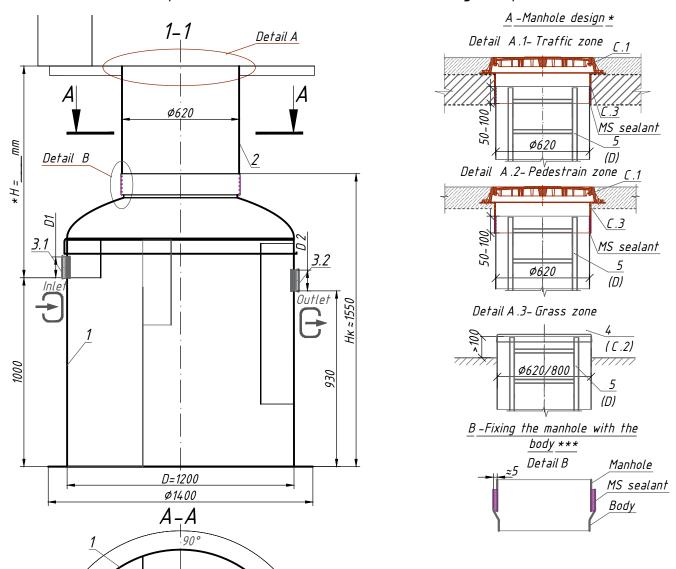

C -Pipes location D1- inlet / D2- outlet on plan



Note

*H-depth of the inlet connection, mm (in standard equipment H up to 2000 mm). H take a multiple of 50mm.

When filling the manhole A.1 - the overall height of the product is less than 200mm; at the design of the manhole A.2 - the total height of the product is bigger than 100 mm.

D=1200 Ø1400

- ** The product is shipped in accordance with the Standard equipment (Tabl. 1), unless otherwise specified in the Additional equipment (Tabl. 2). The complete set of the product agrees with the manager.
- *** The manufacturer has the right to make constructive and pattern changes that do not worsen the characteristics of the product as a whole

Permissible deviation during production of products is 1–3%.

Additional equipment:_____

Specification of materials and equipment. Standard equipment ** (Tabl. 1)

Pos.	Identification	Name	Q-ty	Mass pc., kg	Note
1	Vodaland	Grease Separator Vodaland GreaseBase-3 with sludge trap, fiberglass disch.3l/s, D=1200 Hκ≈1550	1	155	compl.
2		Inspection manhole Ø 620	1		compl.
3.1	D1-Inlet pipe	Rubber seal for connection PVC SN4 Ø 110	1		compl.
3.2	D2-Outlet pipe	Rubber seal for connection PVC SN4 Ø 110	1		compl.
		Volume of light liquids	290		l
		Volume of sludge trap	305		l

** The product is shipped in accordance with the Standard equipment (Tabl. 1), unless otherwise specified in the Additional equipment (Tabl. 2)

Additional equipment (Tabl. 2)

Pos.	,	Identification Name								Note		
Α, Β							D1-Inlet pipe / D2-Outlet pipe :	∫ S	Outlet G			
	For connection D1, D2:					1, D2:	Funnel					
							Smooth end					
							Another:					
			Di	iameter D	pipes D	1, D2:	Ø90					
							Ø160					
							Another:					
C	Manhole design (see A.1, A								, A .2)			
		C.1 Cover:					Garden plastic					
							Load class A 15					
							Load class C 250		V			
							Load class D400					
		C.2 C.3 Fiberglass adaptor plate				C.2	Fiberglass cover Ø620					
						plate	Ø620, h=200мм		V			
							Another:					
D		D. Universal ladder				adder	Aluminium					
							s/s					
Ε				E. 1	Level s	ensor	Oil			A A		
				Sludge								
F	\perp	F. Fas				ening	Belt fastening for D 1200					
Chan.	Q-t	y Sheet	N≗doc	Signature	Date							
Ciraii.	α-7	JIIEEI	N-doc.	Signarare	Dare			Ī	Phase	Sheet	Sheets	
								ı				
	Gr			irease Separator Vodaland GBase-3 (GB-3)		odaLA	AND					