
Grease Separator with a sludge double trap GPro-2 (\$1:20)

A -Manhole design *

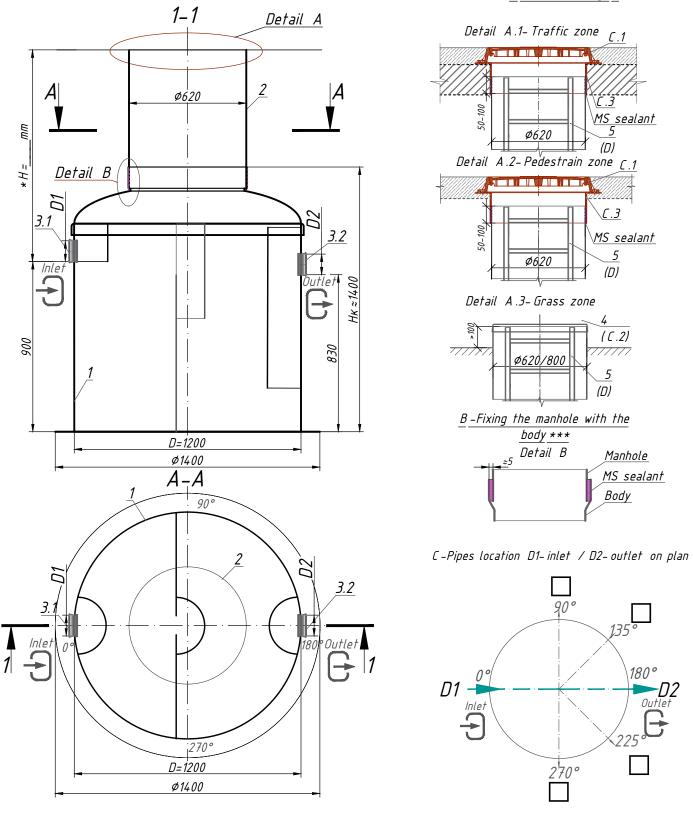

A/-4-

- *H-depth of the inlet connection, mm (in standard equipment H up to 2000 mm). H take a multiple of 50mm. When filling the manhole A.1 the overall height of the product is less than 200mm; at the design of the manhole A.2 the total height of the product is bigger than 100 mm.
- ** The product is shipped in accordance with the Standard equipment (Tabl. 1), nless otherwise specified in the Additional equipment (Tabl. 2). The complete set of the product agrees with the manager.
- *** The manufacturer has the right to make constructive and pattern changes that do not worsen the characteristics of the product as a whole

Permissible deviation during production of products is 1–3%.

Additional equipment:______

Specification of materials and equipment Standard equipment ** (Tabl. 1)

Pos.	Identification	Name	Q-ty	Mass.pc .kg	Note
1	Vodaland	Grease Separator Vodaland GreasePro-2 with a sludge double trap, disch2l/s, fiberglass D=1200 Hk=1400mm	1	165	compl.
2		Inspection manhole Ø 620	1		compl.
3.1	D1-Inlet pipe	Rubber seal for connection PVC SN4 Ø 110	1		compl.
3.2	D2-Outlet pipe	Rubber seal for connection PVC SN4 Ø 110	1		compl.
		Volume of light liquids	215		l
		Volume of sludge trap	413		l

** The product is shipped in accordance with the Standard equipment (Tabl. 1), nless otherwise specified in the Additional equipment (Tabl. 2)

Additional equipment (Tabl. 2)

Pos.		Identification Name								Note		
Α,Β							D1-Inlet pipe / D2-Outlet pipe :	Inlet	Outlet			
				For connec	tion D	1, D2:	Funnel					
							Smooth end					
							Another:					
			Ĺ	Diametr D	pipes D	1, D2:	Ø90					
							Ø160					
							Another:					
С		Manhole desi							l, A.2)			
		C.1 Cover:					Garden plastic	[
							Load class A 15	[
							Load class C 250	[\overline{V}			
							Load class D400	[
	C.2					C.2	Fiberglass cover Ø620					
		C.3 Fiberglass adaptor plate					Ø620, h=200mm	V				
							Another:					
D	D. Universal ladder				ersal l	adder	Aluminium					
							s/s					
Ε		E. Level sensor				ensor	Oil	[A A		
							Sludge					
F					F. Fast	ening	Belt fastening for D 1200	[
Chan.	Q-ty	Sheet	№doc.	Signature	Date							
Criam	,	OTTEET			20.0				Phase	Sheet	Sheets	
								ľ				
								_				
							Grease Separator GPro-2 (GP-1)				AND	