

Grease Separator with a sludge double trap GPro-3 (\$1:25)

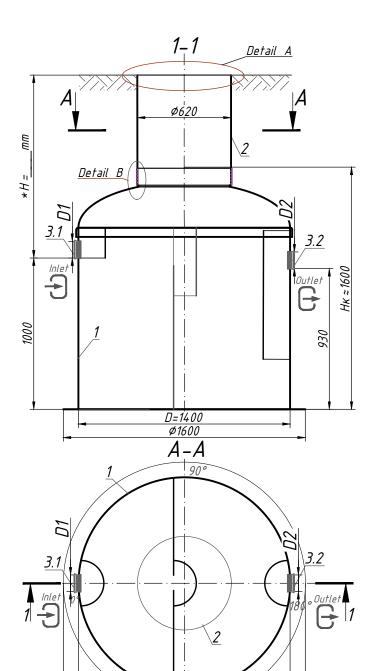


D=1400 Ø1600

<u>A</u> <u>-Manhole design</u> *

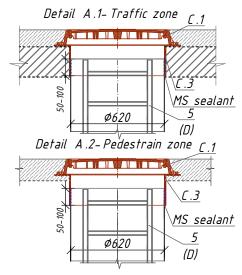


Detail A.3- Grass zone



B-Fixing the manhole with the
body ***
Detail B Manhole

MS sealant
Body

C-Pipes location D1-inlet / D2-outlet on plan

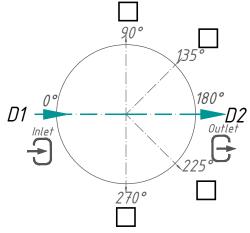

Mata

- *H-depth of the inlet connection, mm (in standard equipment H up to 2000 mm). H take a multiple of 50mm. When filling the manhole A.1 the overall height of the product is less than 200mm; at the design of the manhole A.2 the total height of the product is bigger than 100 mm.
- ** The product is shipped in accordance with the Standard equipment (Tabl. 1), nless otherwise specified in the Additional equipment (Tabl. 2). The complete set of the product agrees with the manager.
- *** The manufacturer has the right to make constructive and pattern changes that do not worsen the characteristics of the product as a whole

Permissible deviation during production of products is 1–3%.

Additional equipment:

Specification of materials and equipment Standard equipment ** (Tabl. 1)

Pos.	Identification	Name	Q-ty	Mass.pc .kg	Note
1	Vodaland	Grease Separator Vodaland GreasePro-3 with a sludge double trap, disch3l/s, fiberglassD=1400 Hk=1600 mm	1	222	compl.
2		Inspection manhole Ø 620	1		compl.
3.1	D1-Inlet pipe	Rubber seal for connection PVC SN4 Ø 110	1		compl.
3.2	D2-Outlet pipe	Rubber seal for connection PVC SN4 Ø 110	1		compl.
		Volume of light liquids	295		l
		Volume of sludge trap	630		l

** The product is shipped in accordance with the Standard equipment (Tabl. 1), nless otherwise specified in the Additional equipment (Tabl. 2)

Additional equipment (Tabl. 2)

Pos			lden	tificatio	Π		Name	Note				
Α, Β							D1-Inlet pipe / D2-Outlet pipe :	Inlet 1	Outlet G			
	ľ			For connec	tion D	11, D2:	Funnel					
							Smooth end					
							Another:					
				Diametr D	pipes D	1, D2:	Ø90					
							Ø160					
							Another:					
Γ		Manhole design (see A.1, A.2)										
	C.1 Cover:				C.1 C	over:	Garden plastic					
							Load class A 15					
							Load class C 250		V			
		C.2					Load class D400					
							Fiberglass cover Ø620					
		C.3 Fiberglass adaptor plate			Ø620, h=200мм		<u>/</u>					
							Another:					
D		D. Universal ladder					Aluminium			F		
							s/s					
Ε		E. Level sensor					Oil					
							Sludge					
F		F. Fastenii			F. Fast	ening	Belt fastening for D 1400					
Chan	Q-1	Ly Chast	N/O of a c	Signature	0-4-	ŀ						
Chan.	<i>α-1</i>	y Sileer	№doc.	Signature	Date	\vdash		\neg	Phase	Sheet	Sheets	
						1		ı				
						<u> </u>						
							Grease Separator GPro-3 (GP-3)			AND		