

Oil Separator with sludge trap OilBaseH100 -20 (\$ 1:25)

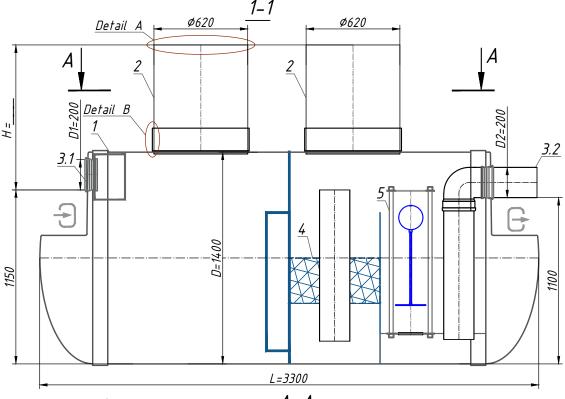

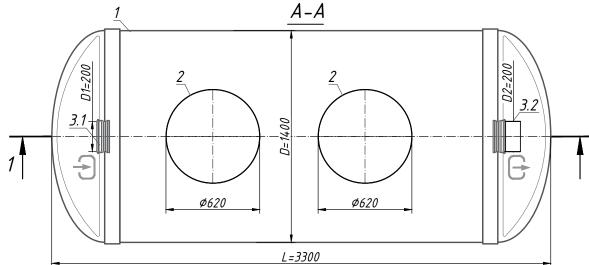

A -Manhole design * B-Fixing the manhole with the body *** <u>≈</u>5 Detail B Detail A.1- Traffic zone C.1 Detail A.2-Pedestrain zone <u>C.1</u> Detail A.3-Grass zone Manhole MS sealant Body C.3 Ø620/800 100 MS sealant <u>5</u> (D) MS sealant Ø620 Ø620

- *H-depth of the inlet connection, mm (in standard equipment H up to 2000 mm). H take a multiple of 50mm.

 When filling the manhole A.1-the overal height of the product is less than 200mm; A.2-the total height of the product is bigger than 100 mm.
- ** The product is shipped according to Standard Equipment (Tabl. 1), unless otherwise specified in the Additional Equipment (Tabl. 2). The complete set of the product agrees with the manager.
- *** The product is shipped according to Standard Equipment (Tabl. 1), unless otherwise specified in the Additional (Tabl. 2) Permissible deviation during production of products is 1–3%.

Additional Information:

Additional information.

Specification of materials	and equipment. Standard	d equipment **(Tabl. 1)
----------------------------	-------------------------	--------------------------

Pos.	Identification	Name	Q-tu	Mass ps.,kg	Note
1	Vodaland	Oil Separator with sludge trap Vodaland OilBaseH100 - 20, disch 20 l/s , fiberglass , D= 1400 , L= 3300 mm	1		compl.
2		Inspection manhole Ø800 / 620	0/2		compl.
3.1,3.2	D1-Inlet / D2-Outlet	For connection PVC SN4 Ø 200	2		compl.
4		Coalescent block	1		compl.
5		Automatic closure device	1		compl.
		Volume of light liquids	1000		l
		Volume of sludge trap	2000		l

** The product is shipped according to Standard Equipment (Tabl. 1), unless otherwise specified in the Additional Equipment (Tabl. 2)

Additional equipment (Tabl. 2)

Pos.	Identification	Name	Note			
A , B		D1-Inlet / D2-Outlet :	Ð	G		
	A .For connection D1, D2:	PVC				
		PE100				
	B.Diameter D1, D2:	D1/ D2				
		Another:				
C		?, A.3)				
	C.1 Cover:	Garden plastic				
		Type "L" class A15				
		Type "T" class C250				
		Type "TM" class D400				
	C.2 Fiberglass cove:	Ø620				
	C.3 Fiberglass adaptor plate:	Ø620, h=200 mm				
		Another:			######################################	
D	D. Universal ladder	Aluminium				
		s/s				
Ε	E. Fastening	Belt fastening for				
Н	H. Level sensor	Sludge			A A	
Π	Π. LEVEL SENSOR	Oil				
		Another:				

Rev.	Q-tu	Sh.	№doc.	Sign	Date							
									Stage	Sheet	Sheets	5
						Oil Separato	or with slu	ıdge trap			*	
							OilBaseH100 –20	≫ \	VODALANE			
						((OBH1- 20)					