

Oil Separator with sludge trap OilBaseH100 -50 (\$ 1:40)

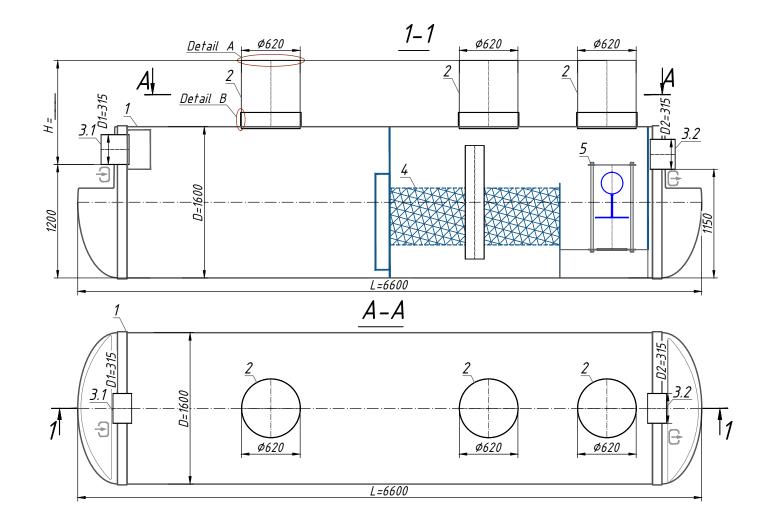

A -Manhole design *

B-Fixing the manhole with the body ***

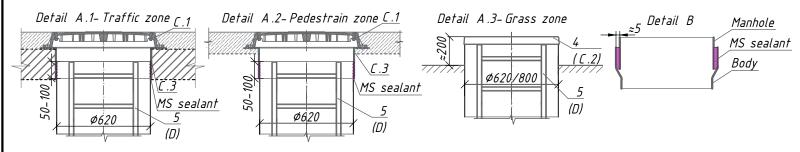

Note:

- *H-depth of the inlet connection, mm (in standard equipment H up to 2000 mm). H take a multiple of 50mm. When filling the manhole A.1-the overal height of the product is less than 200mm; A.2-the total height of the product is bigger
- ** The product is shipped according to Standard Equipment (Tabl. 1), unless otherwise specified in the Additional Equipment (Tabl. 2). The complete set of the product agrees with the manager.
- ***The product is shipped according to Standard Equipment (Tabl. 1), unless otherwise specified in the Additional (Tabl. 2) Permissible deviation during production of products is 1–3%.

Additional Information:

	Specification of materials a	nd equipment. Standard	equip	ment	**	(Tabl.	1)			
Pos.	Identification	Name		Q-	tи	Mass ps.,kg	Note			
1	Vodaland	Oil Separator with sludge trap Vodaland OilBaseH100 –50, disc fiberglass , D= 1600 , L= 6600	h 50 l/.	s, ;	,		compl.			
2		Inspection manhole Ø800 / 620		0/	'3		compl.			
3.1,3.2	D1-Inlet / D2-Outlet	For connection PVC SN4 Ø 315		2	,		compl.			
4		Coalescent block		1	·		compl.			
5		Automatic closure device		i	,		compl.			
		Volume of light liquids		25	00		l			
	Volume of sludge trap						l			
** The product is shipped according to Standard Equipment (Tabl. 1), unless otherwise specified in the Additional Equipment (Tabl. 2)										
Additional equipment (Tabl. 2)										
Pos.	Identification	cation Name				Note				
A , B		D1-Inlet / D2-Outlet :	Ð	G						
1	A For sometime D1 D2	DUG								

					/10	301110	nat equipment (rabt. 2)	,				
Pos.			lden	tification	ОП		Name			N	ote	
A , B							D1-Inlet / D2-Outlet :	Ð	G			
	A.For connection D1, D2:					1, D2:	PVC					
							PE100					
							Corsis					
	B.Diameter D1, D2:					1, D2:	D1/D2					
							Another:					
C	Manhole design (see A.1, A.2, A.3)								2, A.3)			
	C.1 Cover:					Cover :	Garden plastic					
							Type "L" class A15					
							Type "T" class C250			2 1 22 1 22 1 1 22 1 1 2 1 2 1 1 2 1 2 1		
							Type "TM" class D400			1		
		C.2 Fiberglass cove :					Ø620					
		C.3 Fiberglass adaptor plate:					Ø620, h=200 mm					
							Another:			0 (c)		
D		D. Universal ladder					Aluminium					
							s/s					
Ε		E. Fastening				tening	Belt fastening for					
Ц		H. Level sensor					Sludge			♣		
11							Oil					
							Another:					
E H					H.			H. Level sensor Oil	H. Level sensor Oil	H. Level sensor Oil	H. Level sensor Oil	
_												
Rev. Q.	_+,,	Sh.	№doc.	Sign	Date							
12 V. W.	-10	JII.	IV-UUC.	2.9"	Date			Sheet	Sheets			
									Stage			
							Oil Separator with sludge trap		⊘ \	<u> </u>		
							OilBaseH100 –50 (OBH1– 50)	VODA	LAN			