

Drain: Kit rigola FB BASE LN100 Hext.125 gratar FONTA clasica C250 1000x140x125 (04000203031)

04000203031

1000 mm
LENGTH

125 mm
HEIGHT

140 mm
WIDTH



USAGE:

BASE class C250 gutters are intended for rainwater drainage, they are used in public traffic areas, parking lots and on road surfaces, near sidewalk curbs and in non-circulated areas, without shoulders.

QUALITY CONDITIONS:

- According to SR EN 1433:2002
- According to EU Regulation No. 305/2011
- Declaration of Performance

ADVANTAGES:

- Easy to handle and install
- UV-resistant
- Various installation widths and heights
- Use in public areas
- Long service life

LIFESPAN:

- 20 years - subject to compliance with assembly, storage and operation instructions


INSTALLATION

The Base gutter drainage system can be installed without a collector chamber because both ends of the gutter can be closed with end pieces, and the discharge point to the sewer network will be made through the vertical connection of the gutter.

! For efficient installation, we recommend using G12M29C sealant. It is used for sealing gutters, pipes and drainage systems.

- Curing time: 24h/2-3 mm
- Operating temperature: -10° C to +40° C
- Storage conditions: Store in a ventilated area, at low temperatures.

BASE sealant, construction products, 310 ml tube (G12M29-C).

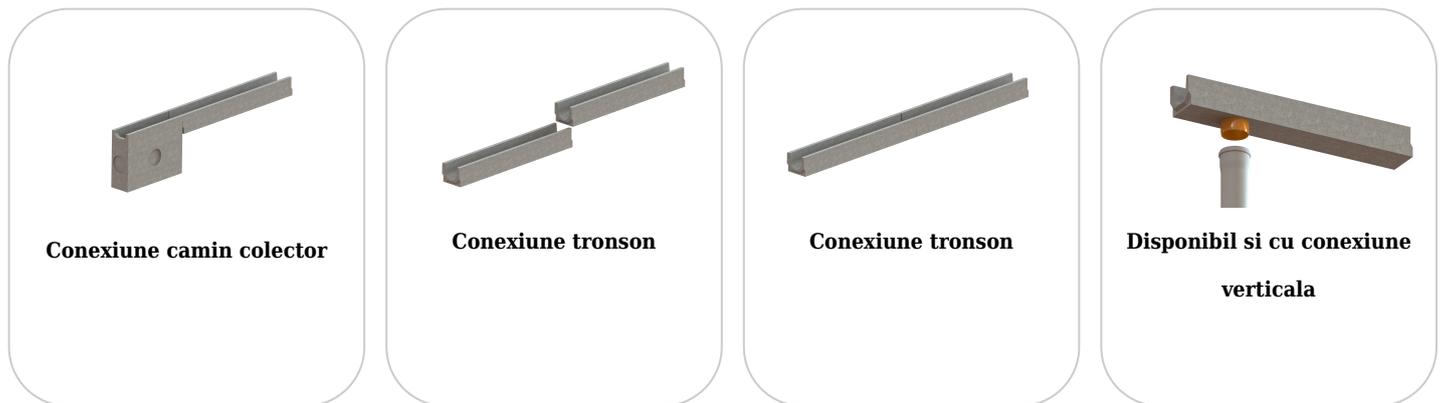

Accessories 04000203031



Etansant BASE, produse pentru constructii, tub 310 ml (G12M29-C)



Placa capat PB BASE cu stut pt rigola FB LN100 Hext.125 (6701-09B)



Placa capat PB BASE pt rigola FB LN100 Hext.125 140x106 (6701-B)

CHARACTERISTICS

Product name	Kit rigola FB BASE LN100 Hext.125 gratar FONTA clasica C250 1000x140x125 (04000203031)
Product code	04000203031
EAN code	6427669001867
Product category	Rigole beton BASE (A15-C250)
Brand	Drain
Weight	30.00 kg
Stock availability	On order
Length, mm	1000
Exterior width, mm	140
Nominal Length, mm	LN100
Exterior Height, mm (Hext)	125
Interior Height, mm (Hint)	95
Load class	C250
Channel material	Concrete
Grate Material	Cast Iron
Grate fastening system	Fastener
Warranty, months	24
Lifespan, years	20
Producer	BETONIKA